

Split-Air Conditioner SKA 3501 EQ C + H

Art.-No.: 23.657.30

Bar-Code: 4006825508154

Sales unit: 1 pc

Air conditioner for **cooling and heating** with a **cooling capacity of 3.500 watts** and a heating capacity of **3.900 watts** - for wall installation. **Automatic dehumidifying of air in a room.**

Complete with remote controlled transmitter, 4 m cooling agent connecting tubes (**made of copper resp. coated by stainless steel reinforcement**) and flexible insulation protection hose, **tube ends equipped with quick release (fig. A).** **Time programming device for ON/OFF.**

The air conditioner consists of two parts, an outdoor part and one for indoors. This allows a quick cooling and warrant an optimal noise level. Due to the quick catches installed at the ends of the cooling agent tubes, the connection of the cooling agent tubes between outdoor and indoor unit is extremely simple and easy to install for everyone.

The max. cooling agent tube length is 4 m. The air conditioner is ideal for large rooms until approx. 115 m³.

Due to the possibility of heating operation, the air conditioner can additionally also be used as „interseasonal heating“.

3 setting of fan speed with a maximum speed of 520 m³/h. With the **automatic dehumidification** the units evaporates from its surrounding **1.3 l/h** excess humidity. **Timer for programme settings, Automatic- and night functions.** All functions can be set with the **remote controlled transmitter.** Motorized ventilation lamella in the indoor unit.

Dimensions:

Indoor unit (WxDxH): 790 x 180 x 275 mm
Outdoor unit (WxDxH): 830 x 255 x 545 mm

Weight:

Indoor unit: 10 kg
Outdoor unit: 34 kg
Weight total gross: 54 kg

Packing dimensions compl.: appr. 935x 360 x 840 mm
(WxDxH):

Features:

- Air suction grid (1)
- Air escape lamella (2)
- LCD-display (3)
- Remote control (4)
- Pipe connection (5)
- Fan (6)



Technical data:

- Free of FCKW (R407C)
- Energy-Efficiency-Class: B
- EER / COP: 3.02 / 3.42
- Energy consumption when cooling: 580 kWh per year
- Cooling capacity: 3.500 watts
- Heating capacity: 3.900 watts
- Air throughput: 520 m³/h
- Capacity of humidity reduction: 1.3 l/h
- Mains: 230 V ~ 50 Hz
- Refrigerant quantity: appr. 1100 g for 4 m of tube
- Noise level: Indoors: ≤ 40 dB (A)
Outdoors: ≤ 55 dB (A)

Characteristics according to EN 14511



A

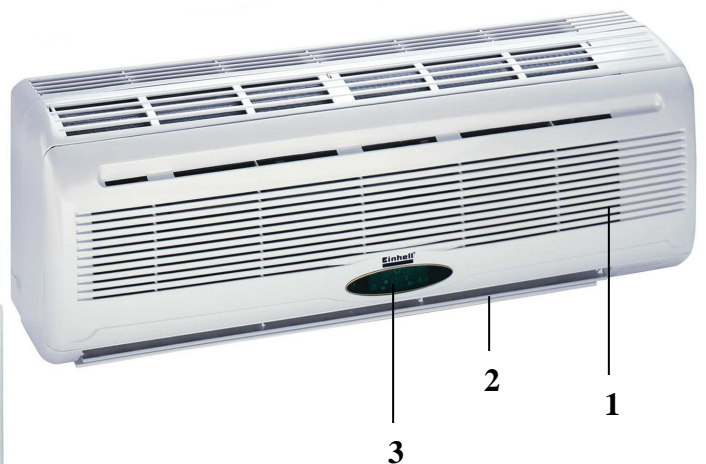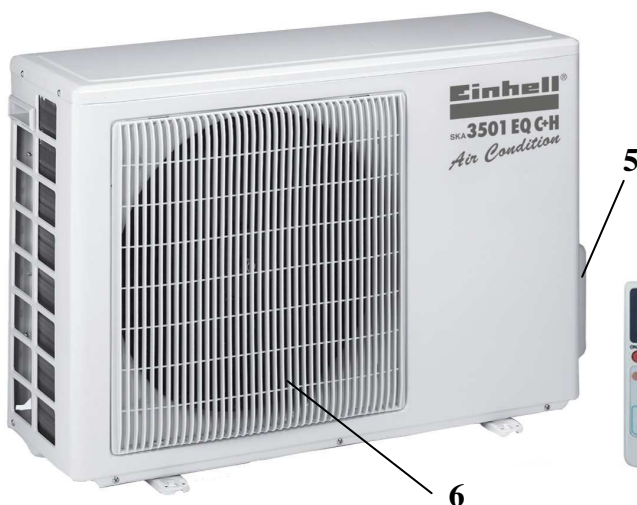

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n0t\Originale_Englisch_PA04\2365730_01014.doc

Erstelldatum / create date: 19/01/2005 16:59:00

Aktualisiert / up dated: 05/09/2006