





RED

# RG-DP 7525 N

## Submersible Pump

Powerful and robust stainless steel submersible pump to empty garden ponds, flooded basements and construction sites. It takes foreign particles up to  $\varnothing$  25 mm in size. In addition to its typical use in excavation pits, this pump is particularly suitable for emptying garden ponds and swimming pools. Universally controlled ON/OFF switching height and operation differential via continuously adjustable float switch. The float switch can also be fixed during continuous operation. One of the advantages of these pumps is their carrying handle with integrated cable reel for proper storage and transport.

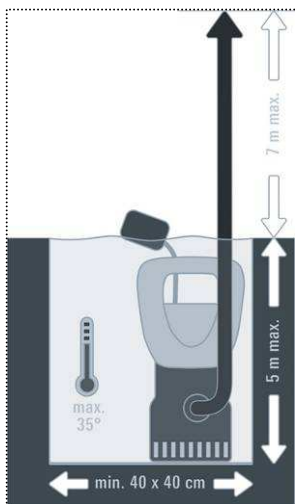

### Features

- Carrying handle with integrated cable reel
- Continuously height-adjustable float switch
- Universal plug G 1 1/2 (ca. 47.8 mm) male thread
- Impurities up to 25 mm are handled
- Housing made of stainless steel





**RED**

# RG-DP 7525 N

## Submersible Pump



Carrying handle

Integrated cable reel

Continuously adjustable float switch


Housing made of stainless steel

Plug  
G 1 ½ (ca. 47.8 mm)  
male thread

Continuously adjustable float switch



Performance data:

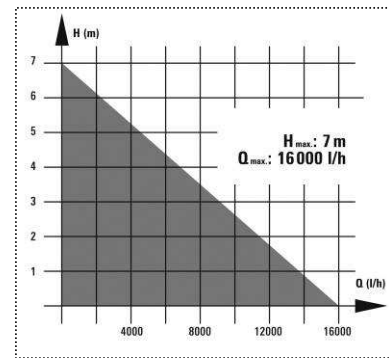

### Logistic Information

<b>Typ:</b>	<b>RG-DP 7525 N</b>
<b>Art.-No.:</b>	41.706.11
<b>Ident-No.:</b>	01018
<b>Bar code:</b>	4006825 549379
<b>Packaging:</b>	240 x 200 x 375 mm
<b>Sales unit:</b>	4 pcs
<b>20'':</b>	1,500 pcs
<b>40'':</b>	3,152 pcs
<b>40'' HC:</b>	3,256 pcs
<b>Net weight:</b>	6.56 kg
<b>Gross weight:</b>	6.94 kg

### Technical Data

■ Voltage:	230 V ~ 50 Hz
■ Power:	750 watts
■ Delivery capacity max.:	16,000 l/h
■ Delivery height max.:	7 m
■ Immersion depth max.:	5 m
■ Universal plug:	G 1 ½ (ca. 47.8 mm) female thread
■ Water temperature max.:	35 °C
■ Main cable length:	10 m
■ Foreign particles size:	Ø 25 mm