



# Einhell

**BLUE**

## BG-SP 250 Submersible pump

Art.-No. 41.702.91

Ideal to empty flooded basements, tanks and containers, etc. The installed float switch controls the ON/OFF functions of the pump. High quality of the material i. e. stainless steel-driving gear, top quality axial face seal, screwed cable locks made of stainless steel warrant an almost corrosion-free and a long service life. The complete housing is made of an impact resistant material (plastic) .

### Features


- Handle (1)
- Universal connection for 1" and 1 ¼" – hoses and 1" – male thread (2)
- 90 °angel bracket 1 ½" male thread x 1 ½" male thread (3)
- Float switch (4)

### Technical Data

- Mains: 230 V ~ 50 Hz
- Power: 250 W
- Delivery capacity max.: 6,200 l/h
- Delivery height max.: 5.5 m
- Immersion depth: 5 m
- Water temperature: up to 35 °C
- Hose connection: 1 ½" female thread
- Foreign particle size up to: Ø 3 mm
- Mains cable: 10 m H05RN-F
- ON function: approx. 50 cm
- OFF function: approx. 5 cm
- Exhaust height: 8 mm
- Product weight: 4 kg
- Gross weight: 4.3 kg
- Packing dimensions: 230 x 160 x 320 mm
- Bar code: 4006825 549355
- Sales unit: 4 pcs



### Performance data:

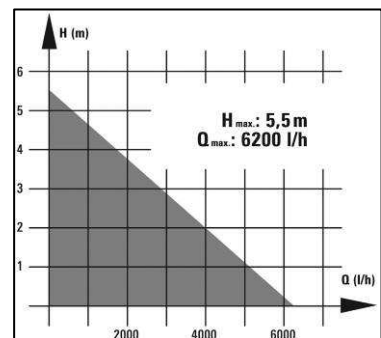

### As special accessory available:

**PVC-drainage hose 10 m/1"**  
Einhell Grey

Art.-No.: 41.737.14  
Bar code: 4006825 549249



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.

File: V:\Einhell-AG\TP-BK\2013\TLT-Sek\01-Sek-allgemein\Azubi\PA04-I-No-Wechsel-Anpassung-08-2013\Originale Englisch-Vorgaenger-Version\4170291\_11021.doc

Erstelldatum/create date: 10.06.2008 10:58:00Aktualisiert/up dated: 28.08.2013