

Powerful connections with  
different material types!

**Einhell**®  
NEW GENERATION



Electric welding transformers are used primarily for weld-joining flat-irons, angle irons, tubes or similar materials. One great advantage of electric welding is that it obviates the need for warming the materials, i.e. welding can be started directly at the requested position. Work pieces of various strengths can also be welded to each other with equal ease. The electric welding transformer can be operated at 230V/400V nominal voltage. Nominal voltage is regulated with a rotary switch. The electric welding transformer is particularly suitable for mobile application.

## NSG 180 F Electric Welding Transformer

### Logistic Information:

<b>Type:</b>	<b>NSG 180 F</b>	<b>Sales unit:</b>	1 pcs
<b>Art. No.:</b>	15.440.60	<b>20``:</b>	600 pcs
<b>Ident-No.:</b>	01026	<b>40``:</b>	-- pcs
<b>Bar Code:</b>	4006825 516364	<b>40``HC:</b>	-- pcs
<b>Packing:</b>	475 x 265 x 400 mm	<b>Weight:</b>	25.8 kgs (gross)




Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Original\_Englisch\_PA04\1544060\_01015.doc  
Erstelldatum/create date: 22.06.2006 16:49:00Aktualisiert/up dated: 17.08.2006

# Powerful connections with different material types!

**Einhell®**  
NEW GENERATION

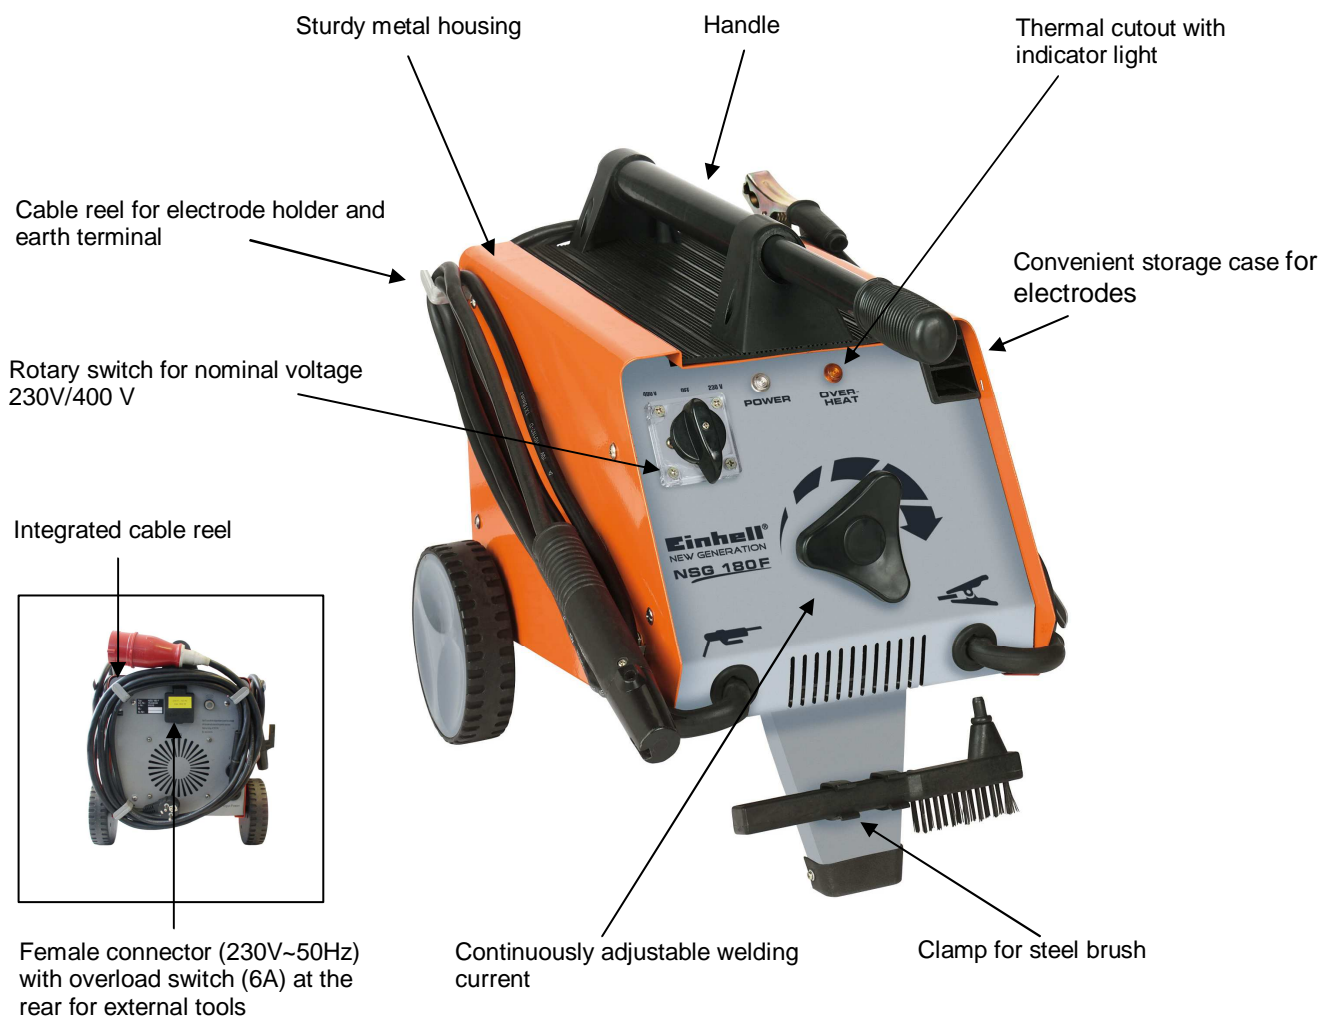

## Features:

- Female connector (230V~50Hz) with overload switch (6A) at the rear side for external tools
- Continuously-adjustable welding current
- Convenient electrode storage
- Main cable 400 V
- Main cable 230 V
- Rotary switch for nominal voltage 230V/400 V
- Thermal cutout with indicator lamp
- Handle
- Complete with welding accessories
- Turbocooling by integrated cooling fan

## Technical Data:

- Mains: 230 V/ 400 V ~ 50 Hz
- Electrodes: Ø 2,0 – 4,0 mm
- No load voltage: 48 V
- Fuse: 16 A
- Welding current: 160 A at 230 V ~ 160 A at 400 V ~
- Electrodes Ø: 2.0-3.2 mm at 230V 2.0-4.0 mm at 400V

## Logistic Information:

<b>Type:</b>	<b>NSG 180 F</b>	<b>Tool:</b>	<b>Electric Welding Transformer</b>
<b>Art. No.:</b>	15.440.60	<b>Sales unit:</b>	1 pc
<b>Ident-No.:</b>	01026	<b>20`:`</b>	600 pcs
<b>Bar Code:</b>	4006825 516364	<b>40`:`</b>	-- pcs
<b>Packing:</b>	485 x 270 x 415 mm	<b>40``HC:</b>	-- pcs
		<b>Weight:</b>	25.8 kg (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\1544060\_01015.doc  
Erstelldatum/create date: 22.06.2006 16:49:00Aktualisiert/up dated: 17.08.2006