


The sliding cross cut and mitre table saw will give clean and precise cuts in any wood. Double mitre cuts are possible because of its tilting and swivelling motor-head. In order to increase the precision of the cut, the saw is fitted with a laser which projects a line on the work piece.

#### Features

- Carbide tipped saw blade (1)
- Rotating table for precise angle cuts ranging from  $-45^{\circ}$  to  $+45^{\circ}$  (2)
- Position of lock in  $0^{\circ}$ ,  $15^{\circ}$ ,  $22.5^{\circ}$ ,  $30^{\circ}$ ,  $45^{\circ}$
- Clamping device for safely fixing of the work piece (3)
- Incl. dust bag (4) and transport locking
- Incl. Lasermodule (5)
- Motor head (6) tiltable to the left continuously from  $0^{\circ}$  to  $+45^{\circ}$

#### Technical Data

- |  |   |
|--|---|
| ■ Mains:   | 230 V ~ 50 Hz   |
| ■ Power:   | 1,600 W   |
| ■ Idle speed:  | $4,600 \text{ min}^{-1}$                                      |
| ■ Carbide tipped saw blade:  | $\varnothing 250 \times \varnothing 30 \times 3.0 \text{ mm}$ |
| ■ No. of teeth:  | 60  |
| ■ Turning range:   | $-45^{\circ}$ to $+45^{\circ}$                                |
| ■ Mitre cut:   | $0^{\circ}$ bis $45^{\circ}$ to the left                      |
| ■ Cutting width $90^{\circ} \times 90^{\circ}$ :                       | $115 \times 75 \text{ mm}$                                    |
| ■ Cutting width $45^{\circ} \times 90^{\circ}$ :                       | $115 \times 40 \text{ mm}$                                    |
| ■ Cutting width $90^{\circ} \times 45^{\circ}$ :                       | $75 \times 82 \text{ mm}$                                     |
| ■ Cutting width $45^{\circ} \times 45^{\circ}$ :<br>(Double mitre cut) | $75 \times 40 \text{ mm}$                                     |
| ■ Net weight:  | 12.3 kg   |
| ■ Gross weight:  | 13.7 kg   |
| ■ Packing dimensions:  | $510 \times 450 \times 380 \text{ mm}$                        |
| ■ Bar code:  | 4006825 553321  |
| ■ Sales unit:  | 1 pc  |

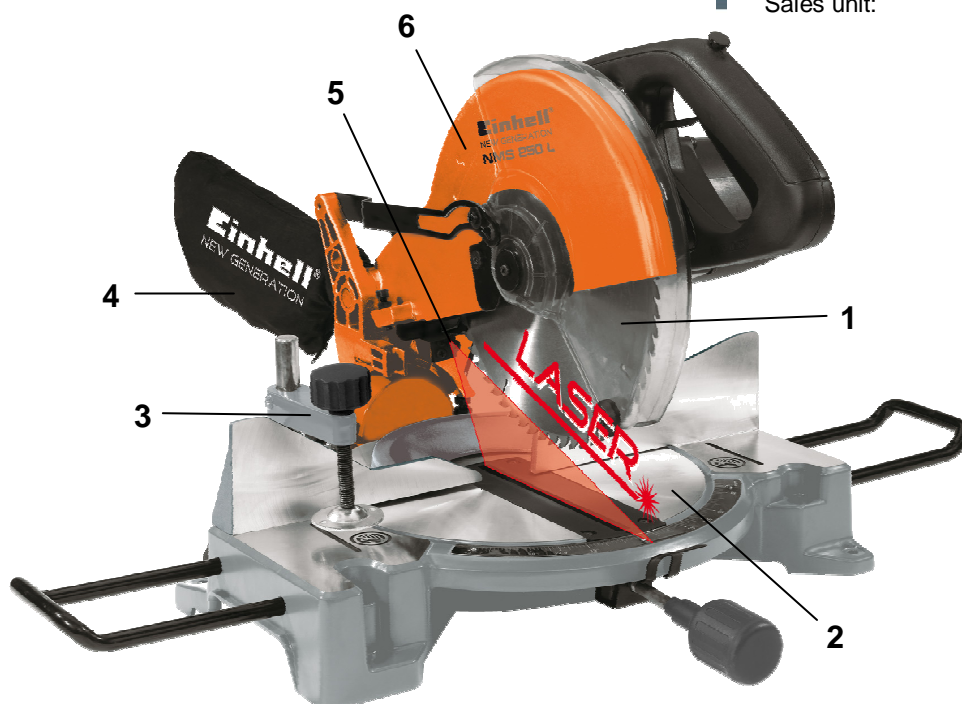

#### As special accessories available:

- |   |  |
|---|--|
| <b>Carbide tipped saw blade</b><br>$\varnothing 250 \times \varnothing 30 \times 3.2 \text{ mm}$ ; 24 teeth | Art.-No.: 43.111.10<br>Bar code: 4006825431223 |
| <b>Carbide tipped saw blade</b><br>$\varnothing 250 \times \varnothing 30 \times 3.2 \text{ mm}$ ; 48 teeth | Art.-No.: 43.111.11<br>Bar code: 4006825431230 |
| <b>Carbide tipped saw blade</b><br>$\varnothing 250 \times \varnothing 30 \times 3.2 \text{ mm}$ ; 60 teeth | Art.-No.: 43.111.13<br>Bar code: 4006825503166 |