



## Submersible Pump TMP 600-S Niro (stainless-steel)

Art.-No.: **41.703.21**

bar code: 4006825503289

Sales unit: 4 pcs

Ideal to empty flooded basements, tanks and containers, etc. The installed float switch controls the ON/OFF functions of the pump automatically. With its tremendous capacity of max. 18.000 l/h and a delivery height of max. 8 m this model in **stainless steel** handles all pumping tasks with ease.

High quality of the material e.g. stainless steel-driving gear, top quality axial face seal, screwed cable locks made of stainless steel warrant an almost maintenance-free and a long service life for semi-professional use.


A precise fine-tuning between motor and turbine blade wheel achieves a high degree of effectiveness of various technical data.

### Technical data:

- Mains: 230 V ~ 50 Hz
- Power: 600 watts
- Delivery capacity max.: 18.000 l/h
- Delivery height max.: 8 m
- Immersion depth max.: 5 m
- Water temperature: up to 35°C
- Foreign particles up to: Ø 4 mm
- Mains cable: 10 m H07RN-F (rubber)
- ON function: at approx. 50 cm height
- OFF function: at approx. 5 cm
- Hose connection: 1 1/2" female thread
- Weight: 8.5 kg
- Packing Dimensions: 335 x 230 x 170 mm

### Performance data:

Delivery height	Delivery capacity
2 m	15.000 l/h
4 m	11.500 l/h
6 m	6.400 l/h

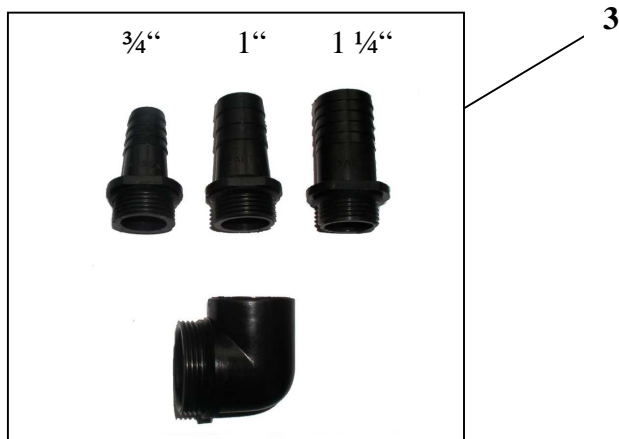

### Features:

- Carrying handle (1)
- Float switch (2)
- 4-pcs connection kit (3)



### As special accessory available:

Drainage hose 10 m / 1"

Art.-No.: **41.737.11**

bar code: 4006825414707

