



Einhell

TH-SM 2534 Dual Sliding Mitre Saw

Art.-Nr. 43.008.25

Features


- Tilting motor head continuously from 0° to +45° to the left and to the right
- Carbide tipped saw blade in professional quality, cutting capacity more than 200 m in chipboard
- Double pivoted sliding feature (1)
- Incl. dust bag (2) and bilateral support clamps (4)
- Carbide tipped saw blade (3)
- Work piece bar with detachable frame on the right (5)
- Table inlay with scale (6)
- Incl. laser (line operated) (7)
- Rotating table for precise angle cuts ranging -45° to +45° with positions of lock (8)
- Clamping device for safely fixing of the work piece (9)

Technical Data

- Mains: 230 V ~ 50 Hz
- Power: 2,350 W S6 25%
2,100 W S1
- Idle speed: 4,000 min⁻¹
- TCT saw blade / teeth: Ø 250 x Ø 30 mm / 48 teeth
- Max saw width 90° / 45°: 340 x 75 mm / 240 x 75 mm
- Max saw width 2 x 45°: left: 240 x 42 mm
right: 240 x 25 mm
- Cutting width max: 340 mm
- Product weight: 14.8 kg

Logistic Data

- Net weight: 16.0 kg
- Gross weight: 19.5 kg
- Packing dimensions: 805 x 580 x 465 mm
- Bar code: 4006825 584943
- Sales unit: 1 pc

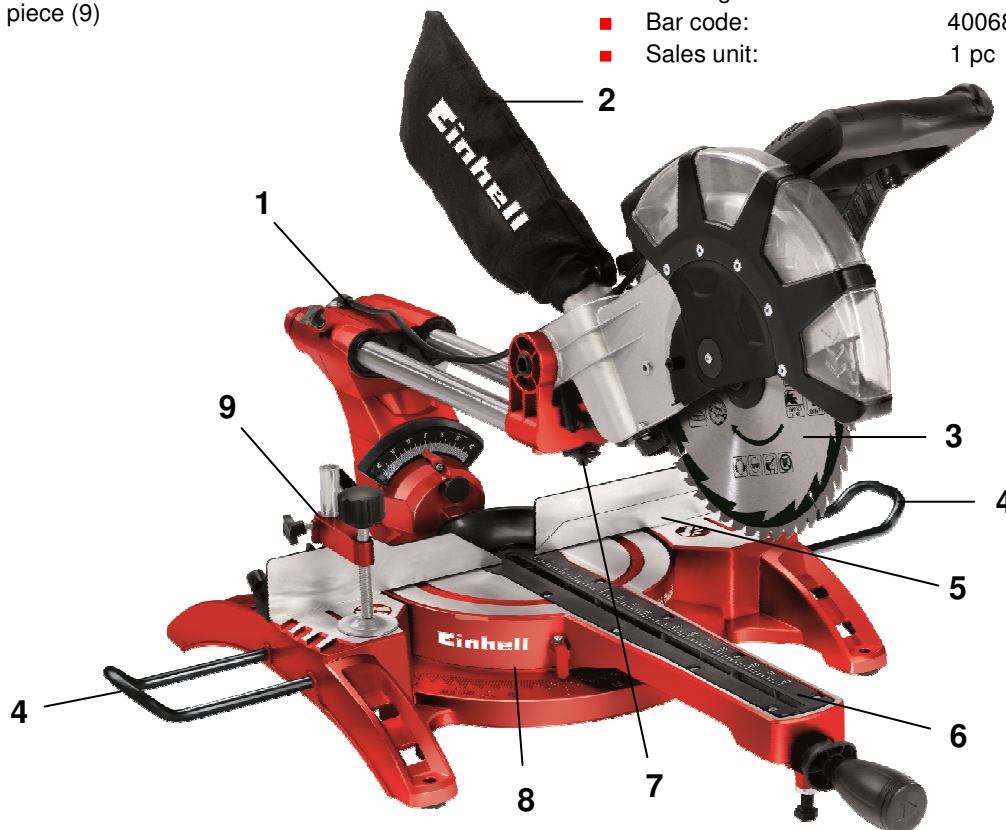

As special accessories available:

TCT saw blade set	Art.-No.: 45.021.33	TCT saw blade set	Art.-No.: 43.111.11
Ø 250 x Ø 30 x 3.0 mm AK	Bar code: 4006825 534276	Ø 250 x Ø 30 x 3.2 mm 48T	Bar code: 4006825 431230
TCT saw blade	Art.-No.: 43.111.13	TCT saw blade	Art.-No.: 43.111.10
Ø 250 x Ø 30 x 3.2 mm 60T	Bar code: 4006825 503166	Ø 250 x Ø 30 x 3.2 mm 24T	Bar code: 4006825 431223

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.

File: \\aa-fas-2\office\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n0t\Originale_Englisch_PA04\4300825_11012.doc

Erstelldatum/create date: 06.06.2012 13:40:00Aktualisiert/up dated: 09.07.2013