

Submersible Pump YGL-SM 750

Art.-No.: **41.705.88**

Bar code: **4006825529739**

Sales unit: **4 pcs**

Powerful and robust submersible pump to empty garden ponds, flooded basements and construction sites. It takes foreign particles up to Ø 35 mm in size. The pump is equipped with a float switch for automatic ON / OFF operation for a varying water level.

High quality standard at materials and constructional design, e. g. a stainless high-grade steel drive shaft warrants a maintenance-free operation and durable application.


Technical data:

- Mains: 230 V ~ 50 Hz
- Power: 750 watts
- Delivery capacity max.: 15000 l/h
- Delivery height max.: 8 m
- Immersion depth max.: 8 m
- Water temperature max.: 35°C
- Hose connection: 1 1/2" female thread
- Foreign particles size: Ø 35 mm
- Mains cable: 10 m H05RN-F
- ON-Function: approx. 50 cm
- OFF-Function: approx. 5 cm
- Minimum immersion: 40 mm
- Weight: 6.1 kg
- Packing dimensions: 220 x 160 x 360 mm

Features:

- handle (1)
- Float switch (2)
- 90° angle bracket 1 1/2" male thread x 1 1/2" male thread (3)
- Universal connection for 1" and 5/4"-hose connection as well as 1"-male thread (4)

Performance data:

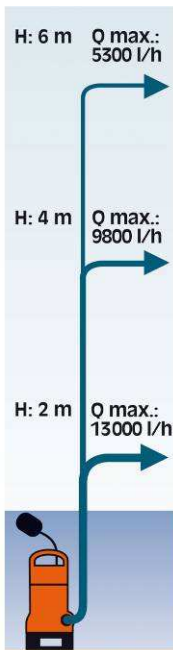

As special accessory available:

PVC-Drainage hose 10 m / 1"

Art.-No.: **41.737.11**

Bar code: **4006825414707**