



Mobile and compact air conditioner, which provides a comfortable indoor climate. Cooling and dehumidifying in one unit. The unit is completely assembled and ready for service after the exhaust hose has been connected.

With soft keys all operating levels can be set and also the air conditioner can be switched on/off. The thermostat regulation provides a well-balanced indoor climate. This model is suitable for rooms of max. 95m<sup>3</sup>.




## Alaska 110 Portable Air Conditioner

### Logistic information:

|                   |                    |                   |                  |
|-------------------|--------------------|-------------------|------------------|
| <b>Type:</b>      | <b>Alaska 110</b>  | <b>Sales unit</b> | 1 pc             |
| <b>Art.-No.:</b>  | 23.602.20          | <b>20``:</b>      | 92 pcs           |
| <b>Ident-No.:</b> | 01016              | <b>40``:</b>      | 196 pcs          |
| <b>Bar code</b>   | 4006825 534672     | <b>40`` HC:</b>   | 288 pcs          |
| <b>Packaging:</b> | 695 x 395 x 887 mm | <b>Weight:</b>    | 39.0 kg (brutto) |



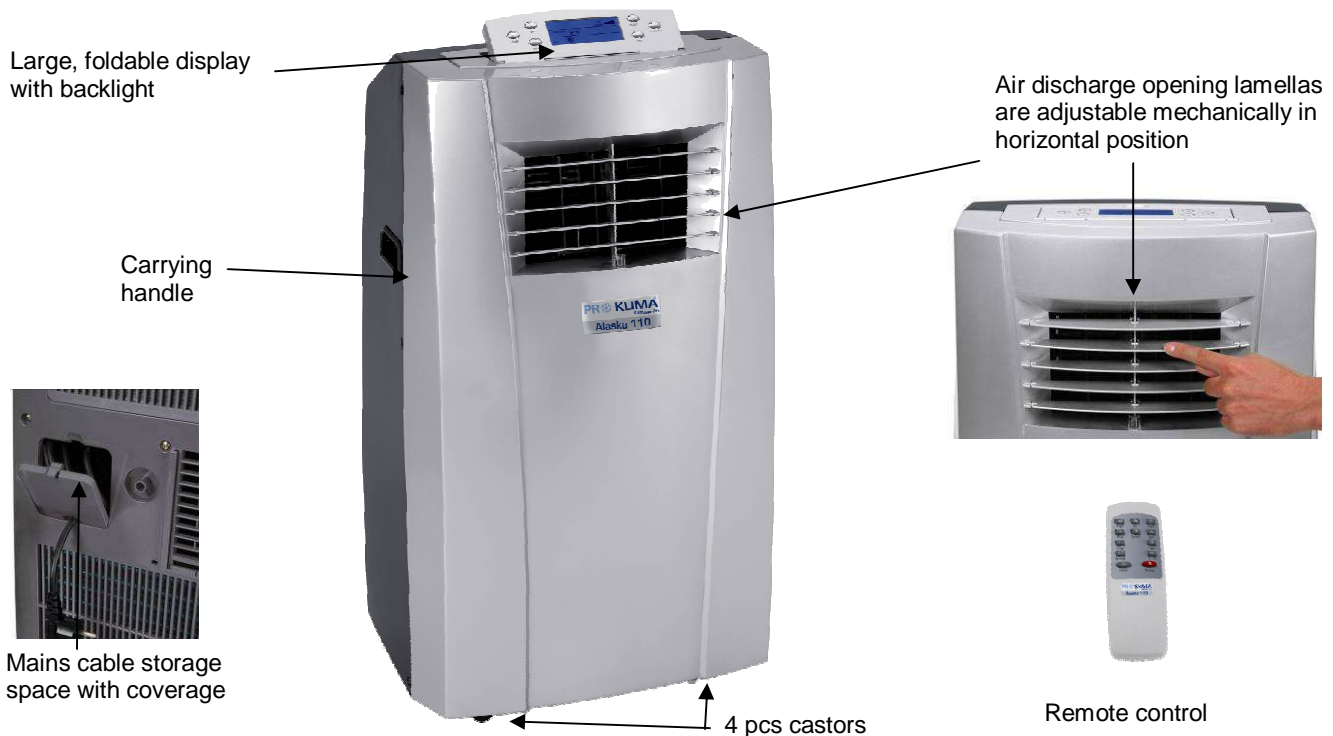

**Functions:**

- LCD-Display, with backlight
- Target – temperature attitude: +18°C up to +30°C
- Fan speed: 3-settings
- Operating level section (MODE): Cooling, Dehumidifying, Ventilation
- „Swing“ - Funktion
- Temperature display reversible °C / °F
- Input delay: 0.5 to 24 h
- Power-on time: 0.5 – 24h, Continuous operation
- Unit On/Off

**LCD-Display for:**

- Actual temperature
- Target temperature
- Timer on
- Fan speed
- Cooling, Dehumidifying, Ventilation
- Swing - Funktion on
- Condensation water tank full

**Features:**

- large, foldable control panel
- Air suction filter
- Air discharge opening lamellas are adjustable mechanical in horizontal position
- Condensate return during the cooling operation – no condensate box deflation necessary
- Integrated condensation box (approx. 1.2 litre volume)
- Air dehumidifier – function (constant dehydration over condensation hose)
- Mains cable storage space with coverage
- exit air hose with adapter
- 4 pcs castors
- remote control

**Technical data:**

- free of FCKW (R407C)
- Energy-Efficiency-Class: A
- EER / COP: 2.51 / -
- Energy consumption at cooling: 650 kWh / year
- Mains: 230 V ~ 50 Hz
- Cooling capacity: 3.266 watts
- Air circulation max.: 430 m³/h
- Exhausted room humidity max. (30°C/80% RH): approx. 70 l/day
- Quantity of coolant: 580 g
- Noise level: ≤55dB (A)
- Weight (net): 34 kg
- Characteristics of: EN 14511

**Logistic information:**

|                   |                    |                |                                 |
|-------------------|--------------------|----------------|---------------------------------|
| <b>Type:</b>      | <b>Alaska 110</b>  | <b>Tool:</b>   | <b>Portable Air Conditioner</b> |
| <b>Art.-No.:</b>  | 23.602.20          | <b>VE:</b>     | 1 pc                            |
| <b>Ident-No.:</b> | 01016              | <b>20``:</b>   | 92 pcs                          |
| <b>Bar code</b>   | 4006825 534672     | <b>40``:</b>   | 196 pcs                         |
| <b>Packaging:</b> | 695 x 395 x 887 mm | <b>40``HC:</b> | 288 pcs                         |
|                   |                    | <b>Weight:</b> | 39.0 kg (brutto)                |

