





RED

RG-SP 750 LL

Submersible Pump

This pump is ideal for emptying flooded basements, tanks and containers, etc. The integrated float switch controls the ON/OFF functions of the pump. For clearing shallow fluid levels (up to 4 mm) the float switch can be fastened in continuous operation position.

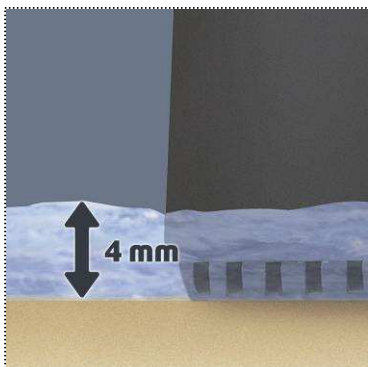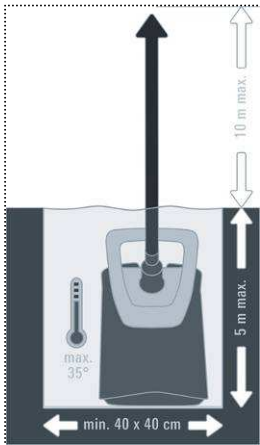

Features

- Change-over switch for automatic and continuous operation
- Integrated float switch
- Carrying handle
- Universal connection G 1 ¼ (ca. 42 mm) female thread
- Integrated cable reel





RED


RG-SP 750 LL

Submersible Pump



Change-over switch for automatic and continuous operation

Performance data:

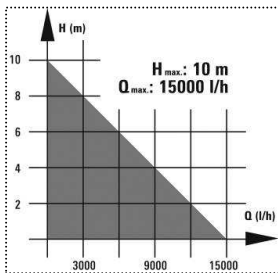

Logistic Information

Typ:	RG-SP 750 LL
Art.-No.:	41.706.62
Ident-No.:	01018
Bar code:	4006825 549300
Packaging:	240 x 190 x 340 mm
Sales unit:	4 pcs
20'':	1,536 pcs
40'':	3,192 pcs
40'' HC:	-- pcs
Net weight:	6.4 kg
Gross weight:	6.9 kg

Technical Data

■ Mains:	230 V ~ 50 Hz
■ Power:	750 watts
■ Delivery capacity max.:	15,000 l/h
■ Delivery height max.:	10 m
■ Pressure:	1 bar
■ Immersion depth max.:	5 m
■ Water temperature max.:	35 °C
■ Main cable:	10 m H07RN-F
■ Hose connection:	G 1 ¼ (ca. 42 mm) AG male thread
■ Immersion min.:	4 mm