

**RED**



RT-TS 2231 UD

Table Saw

The RT-TS 2231 UD circular bench saw is powered by a strong 2.2 kW induction motor with mechanical brake. The saw is powder-coated and therefore permanently protected against corrosion.

The ball-raced height adjustment permits easy and precise setting of the saw blade.

The integrated magnifying glass at the length cut scaling makes reading the scale more comfortable. The aluminium slide is equipped with a profile and can be positioned at an angle ranging from 0 - 45°. This ball-raced slide is guided along the saw bench by a galvanized guide rail. Thanks to the undercarriage and handles, the saw can be transported by a single person.

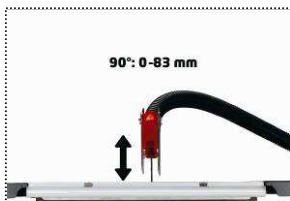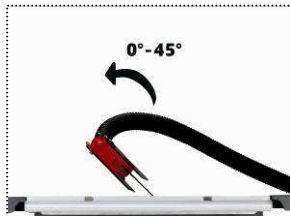

Features

- Powerful induction motor
- Mechanical brake
- Powder-coated framework and working table
- Ball-raced slide with galvanized guard rail
- Undercarriage and handles for easy transport
- Eccentric locking with aluminium guide
- Ball bearing saw blade height adjustment
- Table extension
- Bending range of saw blade 0 - 45°
- Including dust extraction adapter Ø 100 mm
- Carbide-tipped saw blade






RED

RT-TS 2231 UD

Table Saw

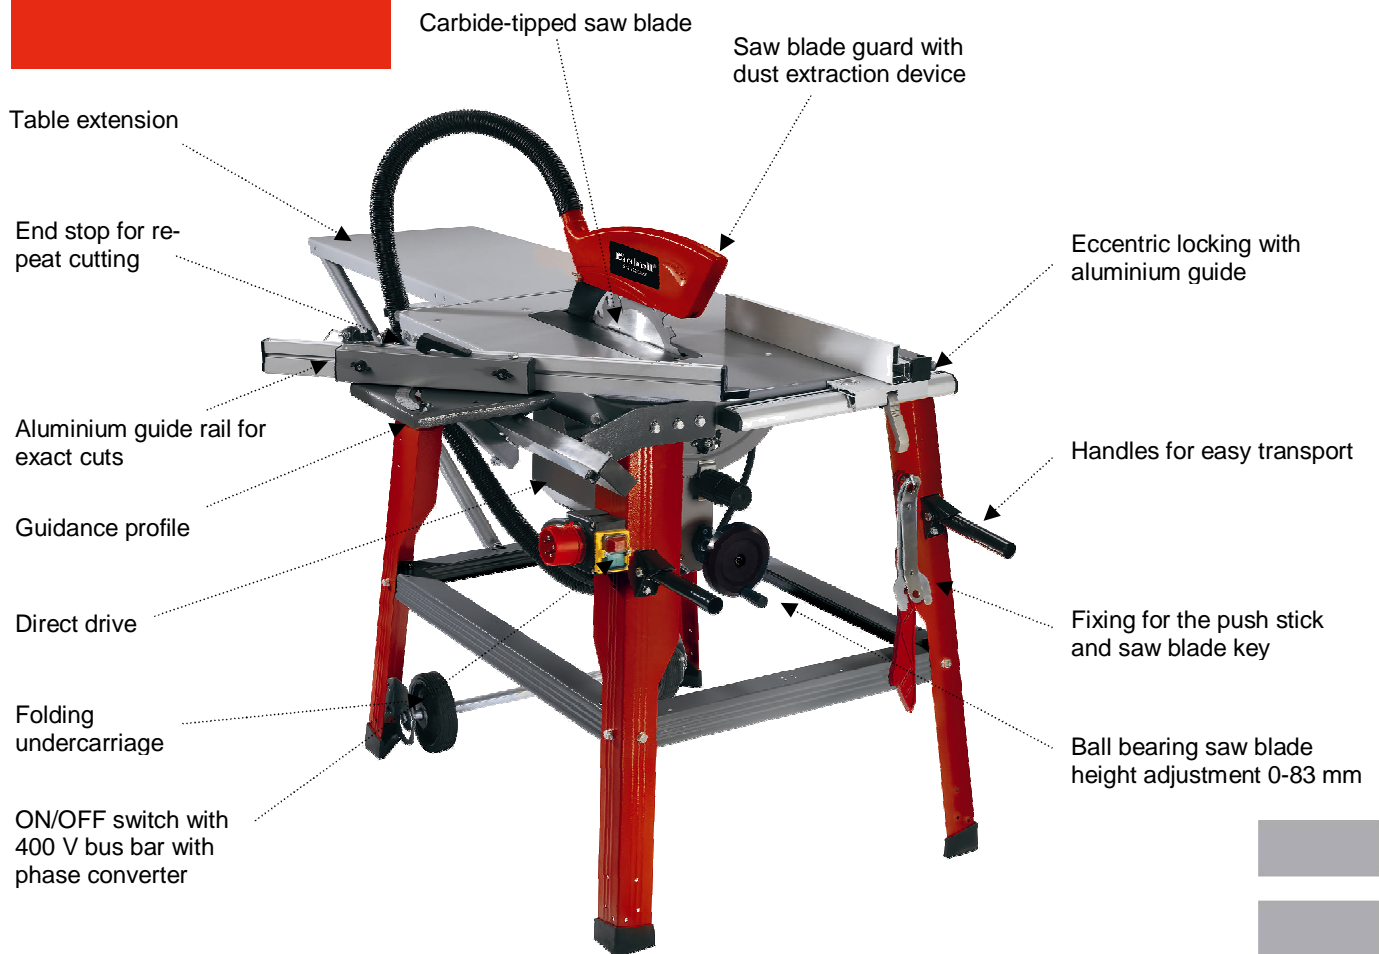

As special accessories available:
TCT saw blade Ø 315 x Ø 30 mm 24 T
TCT saw blade Ø 315 x Ø 30 mm 48 T

Art.No.:
45.020.60
45.020.11

Logistic Information

Technical Data

Type:	RT-TS 2231 UD	■ Motor type:	Induction motor
Art.-No.:	43.071.42	■ Power:	2,200 W (S6 40%)
Ident-No.:	01017	■ Idle speed:	2,800 min ⁻¹
Bar code:	4006825 541298	■ Mains:	400 V 3~ 50 Hz
Packaging:	870 x 640 x 440 mm	■ Cutting height:	90°: 83 mm; 45°: 60 mm
Sales unit:	1 pc	■ Table size:	790 x 580 mm
20'':	84 pcs	■ Working height:	approx. 840 mm
40'':	176 pcs	■ Additional table:	790 x 400 mm
40'' HC:	-- pcs	■ Machine size w/o additional table:	1,100 x 960 x 1,150 mm
Net weight:	58.9 kg	■ Carbide-tipped saw blade:	Ø 315 x Ø 30 x 3.6 mm 24 T
Gross weight:	63.1 kg	■ Range of saw blade:	0 - 45°
		■ Range of sliding carriage:	0 - 45°