


The profi water works unit pumps water from wells and cisterns automatically with stable water pressure. Toilets, washing machines and garden watering are just a few of its numerous applications. Furthermore the garden pump is equipped with a pre-filter, which prevents that dirt arrives into the pump inside. The unit is powered by a sturdy asynchronous motor with thermal protection. The water works is supplied complete with pressure switch and pressure gauge.



Performance data:

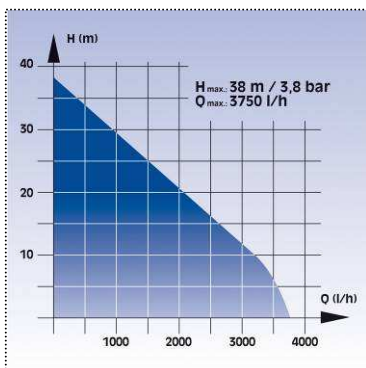

Features

- 3 handles
- Connection for pressure hose
- Vent screw
- Large water filler opening
- Integrated pre-filter
- Connection for suction hose
- Water drain plug
- Pressure switch
- Tank 20 ltr.
- Pressure gauge
- On- and Off switch
- Return valve
- Female thread for hose connection made of stainless steel



As special accessory available:

- Suction hose 4 m plastic
- Suction hose 7 m plastic
- Suction hose 4 m high-quality plastic
- Suction hose 7 m high-quality plastic
- Suction hose 4 m brass
- Suction hose 7 m brass

Art.No.:

- 41.736.10
- 41.736.20
- 41.736.35
- 41.736.45
- 41.736.30
- 41.736.40



Logistic Information

Type:	YGL N.G. 651
Art.-No.:	41.731.71
Ident-No.:	01018
Bar code:	4006825 555226
Packing:	545 x 350 x 675 mm
Sales unit:	1 pc
20'':	227 pcs
40'':	423 pcs
40'' HC:	482 pcs
Net weight:	14.3 kg
Gross weight:	16.5 kg

Technical Data

■ Mains:	230 V ~ 50 Hz
■ Power:	650 W
■ Delivery capacity max.:	3,750 l/h
■ Delivery height max.:	38 m
■ Pressure max.:	3.8 bar
■ Activation pressure max.:	1.5 bar
■ Cut-off pressure max.:	3 bar
■ Tank volume:	20 Liter
■ Suction and pressure connection:	1" female thread
■ Water temperature max.:	35 °C
■ Suction height max.:	8 m