

Extremely wide cuts without a hitch!

Einhell®

NEW GENERATION




Sliding, Cross cut- and Mitre saw:

The saw even allows double mitre cuts thanks to its tilting and swivelling motor head. **For increased cutting precision, the saw has been equipped with a laser function, i.e. a laser beam is projected onto the section plane of the workpiece. The serially supplied base frame allows working at optimum working heights.** Thanks to its sliding function, the saw can make cuts up to 430mm wide and is therefore ideal for cutting wide panels and laminate floorboard in one go.

Roller Stand:

The Roller stand is excellent for the treatment of bulky and heavy workpieces such as bars, boards or plates. By shifting of the castor into the lower drillings of the admission is prevented e.g. the narrow long border the workpieces is sliding down. With big workpieces the large castor will be fix in the upper drilling of the admission. The movement above the castor is here possible.

KGSZ 4300 RS Sliding, Cross cut- and Mitre saw with underframe and Roller Stand


| | | | |
|--|--|---|---|
| Available as special accessory: | Carbide tipped saw blade: Ø 250 x Ø 30 mm 24 teeth | Art.-No.: 43.111.10 Ident.-No.: 01023 Bar-Code: 4006825 431223 |  |
| | Carbide tipped saw blade: Ø 250 x Ø 30 mm 48 teeth | Art.-No.: 43.111.11 Ident.-No.: 01023 Bar-Code: 4006825 431230 | |
| | Carbide tipped saw blade: Ø 250 x Ø 30 mm 60 teeth | Art.-No.: 43.111.13 Ident.-No.: 01013 Bar-Code: 4006825 503166 | |

Logistic Information:

| | | | |
|--------------------|---------------------|--------------------|------------------|
| Type: | KGSZ 4300 RS | Sales unit: | 1 pc |
| Art.-No.: | 43.006.72 | 20°: | 138 pcs |
| Ident.-No.: | 01027 | 40°: | 285 pcs |
| Bar-Code: | 4006825 530988 | 40° HC: | -- pcs |
| Packing: | 870 x 560 x 440 mm | Weight: | 37.6 kgs (gross) |



Extremely wide cuts without a hitch!

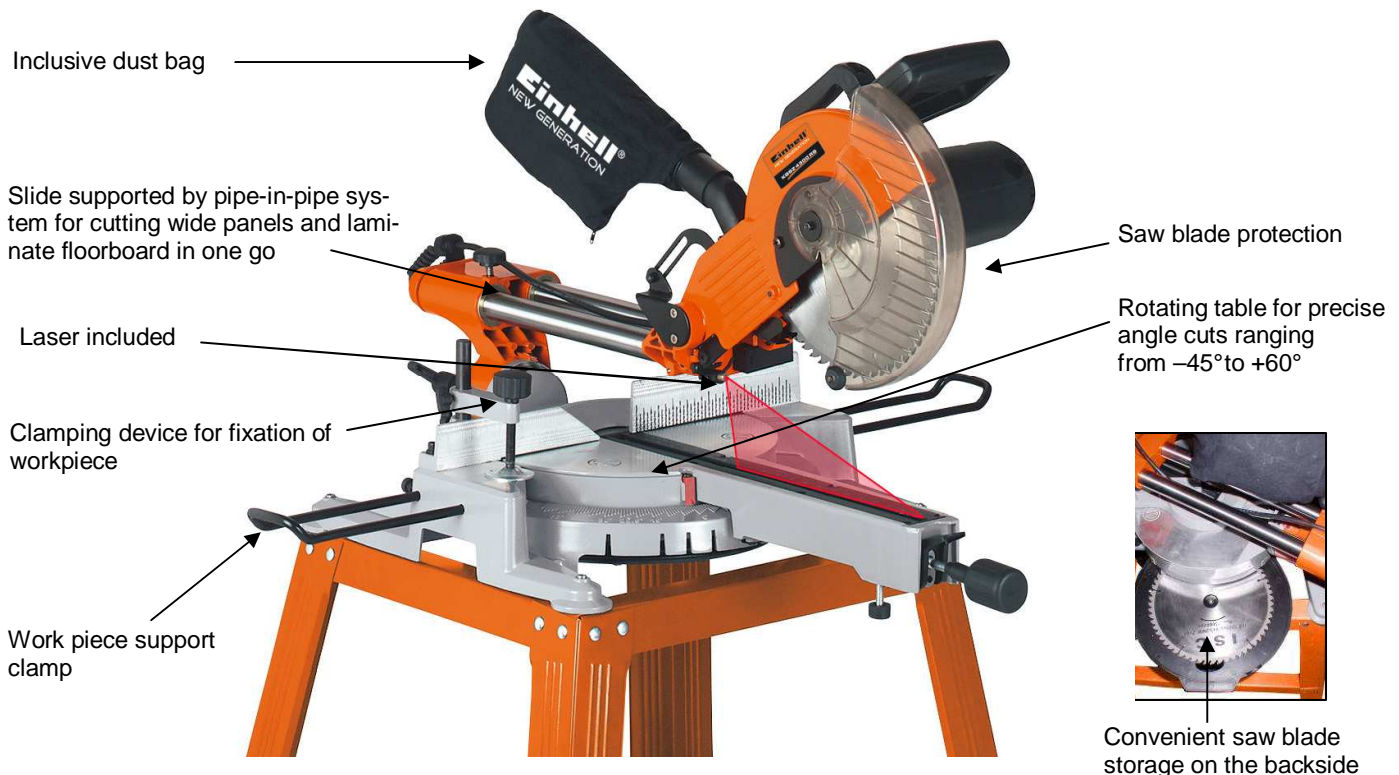

Convenient saw blade storage on the backside

Stable underframe inclusive

Technical Data Roller Stand:

- Carrying roller breadth: 300 mm / \varnothing 38 mm
- Height adjustable range: 635 mm – 1080 mm
- Measure in folded condition: 700 x 440 x 80 mm
- Max. loading: 30 kg

Features Sliding, Cross cut- and Mitre saw:

- Slide supported by pipe-in-pipe system
- Carbide-tipped saw blade with 60 teeth
- Rotating table for precise angle cuts ranging from -45° to $+60^{\circ}$
- Motor head continuously tiltable to the left from 0° to $+45^{\circ}$
- Clamping device for fixation of the workpiece
- Including dust bag and work piece support clamp
- Including laser
- Convenient saw blade storage on the backside
- Including Roller stand

Technical Data Sliding, Cross cut- and Mitre saw:

- Mains: 230 V ~ 50 Hz
- Power: 2,000 watts
- No load speed n_0 : 4,800 min^{-1}
- Carbide tipped saw blade: \varnothing 250 x \varnothing 30 x 3.0 mm
- No. of teeth: 60
- Turning range: -45° to $+60^{\circ}$
- Mitre cut: 0° until 45° to the left
- Cutting width 90° x 90° : 430 x 75 mm

Logistic Information:

| | | | |
|-------------------|---------------------|--------------------|--|
| Type: | KGSZ 4300 RS | Tool: | Sliding, Cross cut- and Mitre saw |
| Art.-No.: | 43.006.72 | Sales unit: | 1 pcs |
| Ident-No.: | 01027 | 20`:`: | 138 pcs |
| Bar Code: | 4006825 530988 | 40`:`: | 285 pcs |
| Packing: | 870 x 560 x 440 mm | 40``HC: | -- pcs |
| | | Weight: | 37.6 kgs (gross) |

