






Quick Start Guide

**Your Safety is most important
please read these safety rules before you use this machine**

General Safety Rules


-  **Read user manual before using the machine**
-  **Wear safety goggles to guard your eyes from possible injury**
-  **Wear gloves to protect your hands**
-  **Wear safety shoes to protect your feet**
-  **Wear hearing protection**

Note - This quick start guide is intended for experienced users who have already assembled the tool, please refer to the manual for further details

Quick Start Guide



Items Included

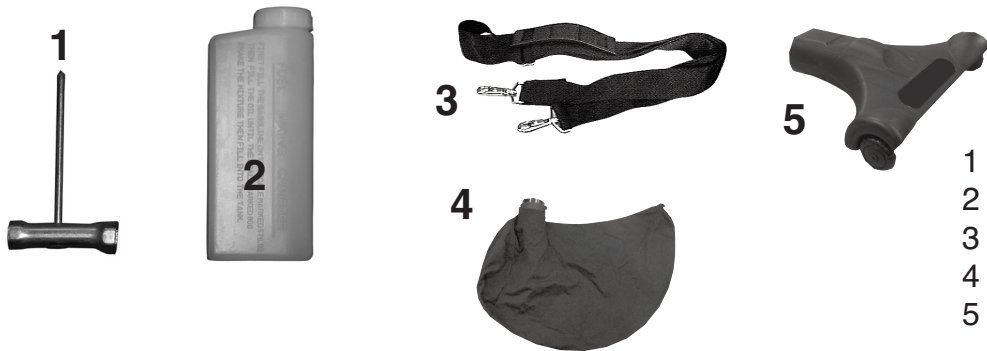

- 1 Plug spanner
- 2 Mixing Bottle
- 3 Shoulder Strap
- 4 Collection bag
- 5 Head

Do you have questions?
We can help
Call Customer Service
Mon-Thur 08:45 am - 5:00 pm
Friday 08:45 am - 3:15 pm



0151 649 1500
Spare Parts also available


1 Unpack the Blower Vacuum

- a) Open carton carefully and remove all items
- b) Ensure you have all items (see above) before you discard the packaging

2 Fuel / Lubrication

- a) Mix the fuel in the mixer bottle provided
- b) Shake the container gently to ensure that it is properly mixed.

N.B Failure to use the correct oil/fuel mixture will cause the engine to seize





Use regular grade unleaded petrol and quality 2 stroke oil

Fuel Mixture is 40:1 (40 parts Fuel to 1 part 2 stroke oil)


3 Starting the Blower Vac

- a) Fit the Vacuum bag to the unit (see below)
- b) Add the fuel to the Blower Vac
- c) Switch Ignition to "I" (on)
- d) Set Choke lever to ON
- e) Secure throttle lever on
- f) Push primer bubble 10 times
- g) Pull starter cord rapidly 4 or 5 times
- NOTE: amount of choke will vary slightly Depending on the external temperature**
- h) Allow engine to warm up at half throttle for a short time and then push the choke in fully

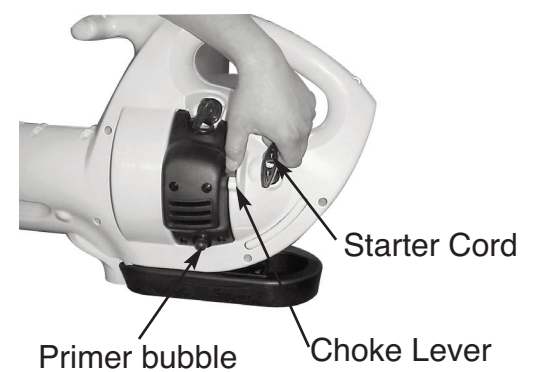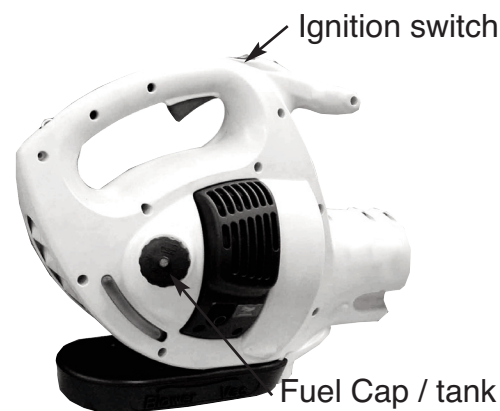

**Fitting Vacuum bag
ENGINE WILL NOT START IF NOT FITTED
CORRECTLY**

Slide Lever Forward

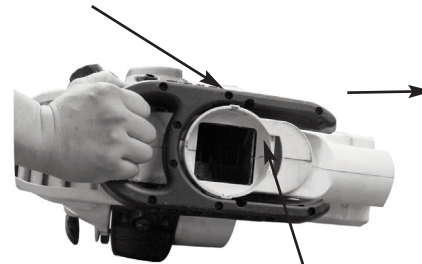

Ensure connecting tube is fitted correctly in housing and engages safety cut out switch.

Fit bag & connecting tube to unit

