

Local Air Conditioner BMK 2100 E

Art.-No.: 23.603.05

Bar code: 4006825599909

Sales unit: 1 pc

Mobile and compact air conditioner, which provides a comfortable indoor climate. Cooling and dehumidifying in one unit. The unit is completely assembled and ready for service after the exhaust hose has been connected. With soft keys and the remote control all operating levels can be set and also the air conditioner can be switched on/off. The thermostat regulation provides a well-balanced indoor climate. This model is suitable for rooms of max. 50 m³ volume.

Features:


- Large control panel with LED-Display
- Air discharge opening lamellas are adjustable mechanically in vertical and horizontal position
- 4 pcs castors
- Exhaust air hose with adaptor (L max. 150 cm)
- Window gap covering
- Air suction filter with activated carbon filter
- Remote control
- Condensate return in the cooling operation – no condensate box emptying necessary
- Integrated condense water box (approx. 0.85 l capacity)
- by very high humidity (> 80%) is a constant drainage via a condense water hose possible

Functions:

- Temperature level: +18° C up to +32° C
- Fan speed: 2-settings
- Operating level section (Mode): Autom., cooling, fan
- Power on-time / Switch-on delay: 1 to 12 h, Continuous operation
- Unit ON-OFF
- Sleep function

LED-Display for:

- Automatic, cooling, fan
- Fan speed
- Condense water box full
- Compressor running
- Timer ON
- Temperature
- Sleep function

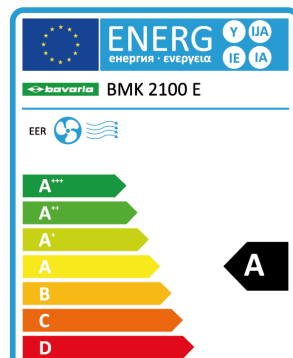

Technical data:

- Coolant: R410A
- Energy-Efficiency-Class: A
- EER / COP: 2.61 / -
- Energy use when cooling: 403 kWh per year
- Mains: 220 – 240 V ~ 50 Hz
- Cooling capacity: 2,100 W
- Air circulation max.: 370 m³/h
- Exhausted room humidity max. (30° C / 80% RH): approx. 14 l a day
- Quantity of coolant: 350 g
- Noise level: 65 dB (A)
- Housing dimensions H x W x D: 752 x 305 x 383 mm
- Net weight approx.: 20.5 kg
- Gross weight approx.: 24 kg

