

DESCRIPTION OF SYMBOLS

V	Volts	n₀	No load speed
	Direct Current	W	Watts
mAh	Milliampere hour	Wh	Watt Hour
L/min	Litres per minute		Warning
	Wear hearing protection		Regulatory Compliance Mark (RCM)
	Read Instruction Manual	PSI	Per Square Inch

CARING FOR THE ENVIRONMENT



Power tools that are no longer usable should not be disposed of with household waste but in an environmentally friendly way. Please recycle where facilities exist. Check with your local council authority for recycling advice.



Recycling packaging reduces the need for landfill and raw materials. Reuse of recycled material decreases pollution in the environment. Please recycle packaging where facilities exist. Check with your local council authority for recycling advice.

SPARE PARTS

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse.

For further information, or any parts not listed here, visit

www.ozito.com.au or contact Ozito Customer Service:

Australia 1800 069 486

New Zealand 0508 069 486

E-mail: enquiries@ozito.com.au

ELECTRICAL SAFETY



WARNING! When using electric tools basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool. Save these instructions and other documents supplied with this tool for future reference.

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

- Always check that the power supply corresponds to the voltage on the rating plate.

GENERAL POWER TOOL SAFETY WARNINGS



WARNING! Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

1) Work area safety

- Keep work area clean and well lit. Cluttered or dark areas invite accidents.

- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.

- Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

2) Electrical safety

- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.

- Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.

- Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.

- Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.

- When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

- If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

3) Personal safety

- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.

- Use personal protective equipment. Always wear eye protection. Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.

- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

INFLATOR SAFETY WARNINGS

- Avoid using power tools for long periods of time without breaks. Vibration from tools can be transmitted into your hands and arms.

- Always remove the plug from the mains socket before making any adjustments or performing maintenance.

- When using the compressor, ensure you are parked in a safe, well lit location, off the road and with the hand brake engaged.

- Ensure your personal safety is not at risk and never use the air inflator while the car is in motion.

- Do not place the hose end against any part of your body when turned on, as this may infuse air into your blood stream putting your health at serious risk.

- Do not make any alterations to this Compressor. Only use the adaptors supplied with this product.

- Use this product only in accordance with operation instructions included in this manual.

- Inspect each part before use. Do not use if bent, broken, melted, burnt or if the unit appears to be damaged.

- Check the tyre pressure before inflating. Never exceed the suggested pressure of the item being inflated. If suggested pressure is exceeded, the item being inflated may burst.

- Do not bend or pinch the air hose while the Compressor is in use.

- It is not suggested that the Compressor work continuously for more than 10 minutes. If 10 minutes of use has been reached, turn it off and let it cool for 10 minutes before using again.

- If the Compressor is making abnormal sounds or its temperature is quite high, turn off the power straight away and let it cool for at least 10 minutes before trying again. Improper use may result in damage of the Compressor.

- Do not leave unattended and operating. Keep out of reach of children.

- Put the Compressor in a dry place if it is not in use for an extended period of time.

- Keep the Compressor away from flammable liquid or gas. Do not allow the Compressor to become wet.

- Never put the connector and adaptors into your mouth, ear or eye. They are not toys.

- Do not point LED at eyes of person or animals.

- Do not use batteries which have suffered deformation during the charging process or shows any other signs of abnormalities including, excessive curvature of the housing, gassing, hissing or cracking.

- Never fully discharge the battery pack. A complete discharge of the battery pack will lead to premature ageing of the battery cells.

- Never charge the batteries unsupervised.

- Do not cover or place any object on top of the charger, place the charger away from heat sources.

- To reduce risk of damage to the electric plug and cord, pull by the plug rather than the cord when disconnecting the charger.

- Make sure the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.

- An extension cord should not be used unless necessary. Use of an improper extension cord could result in the risk of fire, electric shock or electrocution.

- Do not use the cordless tool or the battery charger near vapours and inflammable liquids.

Battery Safety Warnings

- The battery pack is not fully charged out of the carton. First read the safety instructions and then follow the charging notes and procedures.

- For optimum battery performance avoid low discharge cycles. Charge the battery pack frequently.

- Use and store the battery pack in dry conditions with low humidity between 0-50°C, ideally at 15°C. Avoid exposing battery pack and charger to direct sunlight.

- The power supply for this product should be protected by a residual current device (rated at 30mA or less). A residual current device reduces the risk of electric shock.

- Inspect tool cords periodically and if damaged have them replaced by a certified electrician.

- Always use an approved extension lead suitable for the power input of this tool. Before use, inspect the extension lead for signs of damage, wear and ageing. Replace the extension lead if damaged or defective.

- When using an extension lead on a reel, always unwind the lead completely. Do not use a damaged extension lead, or an extension lead that is not suitable for the power input of the tool. Failure to do so may result in a risk of fire and electric shock and will void the warranty.

- Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

- Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.

- Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.

- If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

- Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. A careless action can cause severe injury within a fraction of a second.

4) Power tool use and care

- Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.

- Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

- Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.

- Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.

- Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.

- Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.

- Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.

- Keep handles and grasping surfaces dry, clean and free from oil and grease. Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

5) Service

- Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

ozito

AIR INFLATOR

7.4V

INSTRUCTION MANUAL


SPECIFICATIONS

Powered by:	Internal 7.4V Battery
Input USB-C:	5V/1A
Output USB-A:	5V/1A
Max Air Pressure:	150PSI
Battery Capacity:	2000mAh/7.4V 14.8Wh
LED Torch:	1V
Max Air Volume:	20 l/m
Charging Temperature:	5-40 °C
Working Temperature:	0-45 °C
No load Speed:	18,000 rpm
Charging Time:	2.5-4.5hrs
Weight:	0.52kg

ozito.com.au

3 YEAR

REPLACEMENT WARRANTY*

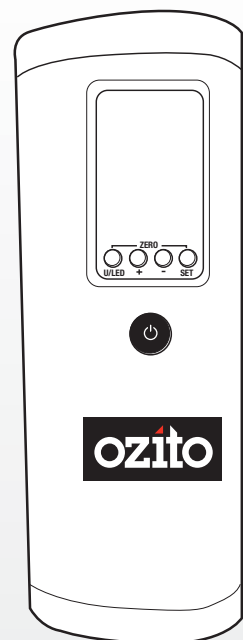


STANDARD EQUIPMENT



7.4V Inflator



Air Hose



USB Charging Cable




General Purpose Adapter



Ball Adapter



2 x Tire Adapters



Storage Bag

AIP-074

WARRANTY

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO YOUR NEAREST BUNNINGS WAREHOUSE WITH YOUR BUNNINGS REGISTER RECEIPT. PRIOR TO RETURNING YOUR PRODUCT FOR WARRANTY PLEASE TELEPHONE OUR CUSTOMER SERVICE HELPLINE:

Australia: 1800 069 486

New Zealand: 0508 069 486

TO ENSURE A SPEEDY RESPONSE PLEASE HAVE THE MODEL NUMBER AND DATE OF PURCHASE AVAILABLE. A CUSTOMER SERVICE REPRESENTATIVE WILL TAKE YOUR CALL AND ANSWER ANY QUESTIONS YOU MAY HAVE RELATING TO THE WARRANTY POLICY OR PROCEDURE.

The benefits provided under this warranty are in addition to other rights and remedies which are available to you at law.

Our goods come with guarantees that cannot be excluded at law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Generally you will be responsible for all costs associated with a claim under this warranty, however, where you have suffered any additional direct loss as a result of a defective product you may be able to claim such expenses by contacting our customer service helpline above.

3 YEAR REPLACEMENT WARRANTY*

Your product is guaranteed for a period of **36 months from the original date of purchase**. If a product is defective it will be replaced in accordance with the terms of this warranty. Warranty excludes consumable parts, for example: valve adapters and accessories.

*This product is intended for DIY use only and replacement warranty covers domestic use.

WARNING



The following actions will result in the warranty being void.

- If the tool has been operated on a supply voltage other than that specified on the tool.
- If the tool shows signs of damage or defects caused by or resulting from abuse, accidents or alterations.
- Failure to perform maintenance as set out within the instruction manual.
- If the tool is disassembled or tampered with in any way.
- Professional, industrial or high frequency use.

KNOW YOUR PRODUCT



AIR COMPRESSOR

1. Power button
2. LCD display
3. USB-A Output
4. LED Torch
5. Air Hose Port
6. USB-C Input
7. Settings
8. Decrease Pressure (-)
9. Function Key
10. LED button (U/LED)
11. Increase Pressure (+)

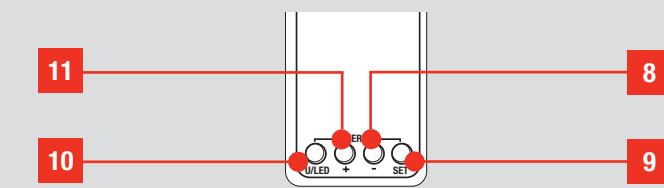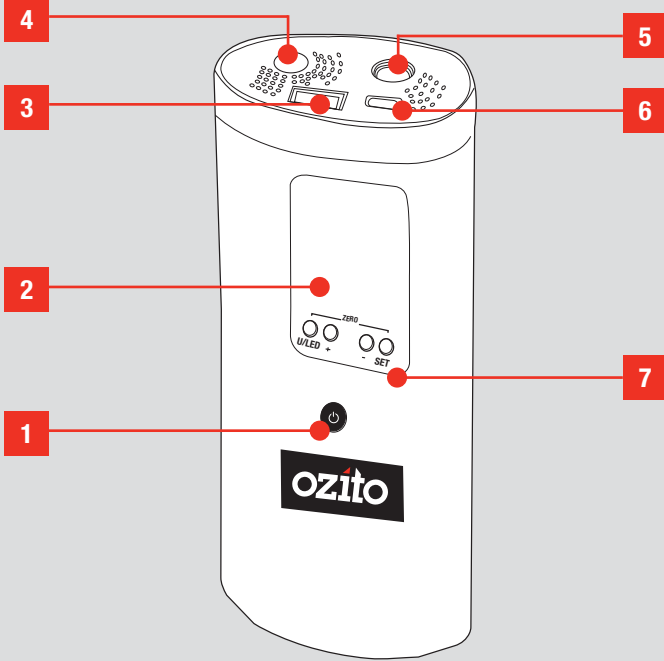

ACCESSORIES


12. Air Hose
13. Charging cable
14. Storage bag
15. Ball Adapter
16. 2 x Tire Adapters
17. General Purpose Adapter



ONLINE MANUAL

Scan this QR Code with your mobile device to take you to the online manual.

3 YEAR REPLACEMENT WARRANTY*




SETUP & PREPARATION


1. ASSEMBLY

Attaching The Air Hose

1. Align the air hose to the air hose port and rotate it clockwise until it fits tightly.

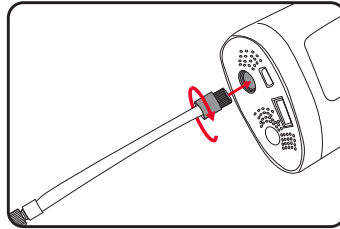


2. Rotate the air hose anticlockwise after use to dismantle it.

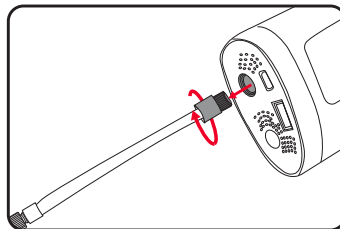


Note: There is a risk of burns from the hose connection when the air hose immediately after using the battery air pump is dismantled.

Attaching The Accessories to the Air Hose

1. Align the ball needle to the air hose fornt and rotate it clockwise until it fits tightly.

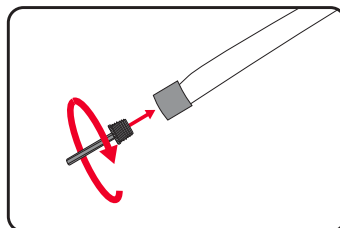


2. Rotate the ball needle anticlockwise after use to dismantle it.

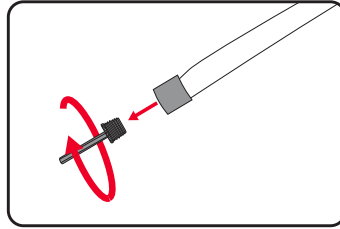

Note: This method can be used to attach the general purpose adapter as well.

3. Attach the tire adapter to the air hose in the same way to attach similar accessories before attaching the accessory. This adapter acts like a connection between the air hose and your personal accessory.

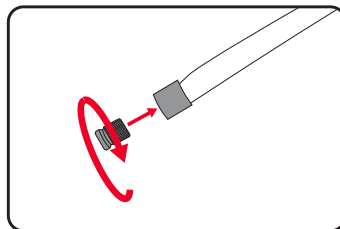


OPERATION


2. CONTROLS

Switching The Unit On/Off

1. Long press the power button to start the inflator; the display will light up displaying (ON).

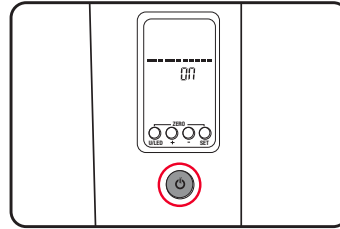


2. Long press the power button to switch the inflator; the display will turn off after displaying the message (OFF).

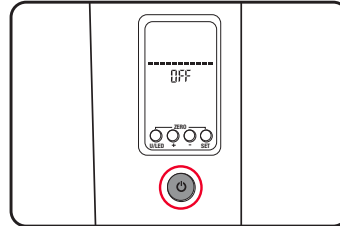

Note: The unit will switch off automatically after approximately 3 minutes of inactivity; the display will also power down.

Digital Display


1. The upper value (a) on the screen displays the pressure of the connected item as it is being inflated.

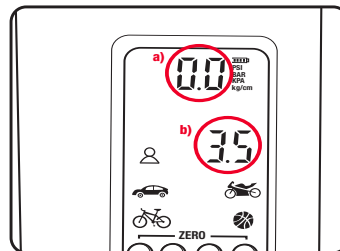


2. The lower value (b) on the screen shows the preset pressure.

Note: If the connected item is already partially inflated, the existing pressure will be registered on the display when connected.

3. The product on which the inflator will be used can be selected from the functions below. (a) car (b) motorcycle (c) cycle (d) ball

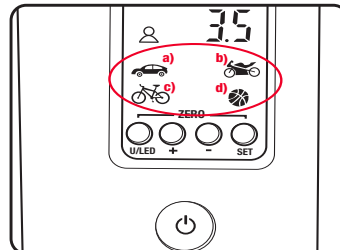


4. This option allows you to choose your desired function, pressure and save it for future use.

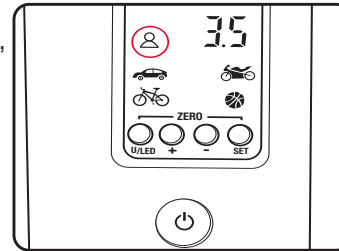

Function Keys

1. The buttons on can be used to set and select functions. (U/LED) - selecting units and LED torch, (+) increase the pressure, (-) decrease the pressure, (SET) selecting the product type

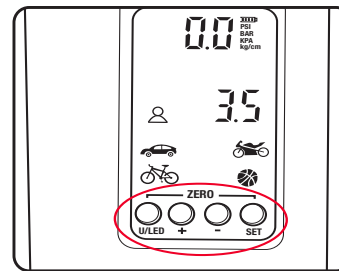


3. USAGE

WARNING! MAINTAIN A FIRM HOLD ON THE AIR HOSE VALVE OR ENSURE THAT THE NOZZLE/VALVE IS SECURELY ATTACHED, OTHERWISE THE HOSE MAY BLOW OUT AND WHIP ABOUT.

WARNING! THERE IS A RISK OF BURNS FROM HOSE CONNECTION OF AIR HOSE IS IMMEDIATELY REMOVE AFTER USING INFLATOR.


Function Selection

1. Press the function button to select one of the 5 select functions. Function Adjustable range
Car mode : 0-4.4 bar
Motorcycle mode : 0-3.7 bar
Bike mode : 0-10.3 bar
Custom mode : 0-10.3 bar
Ball mode : 0-1.0 bar

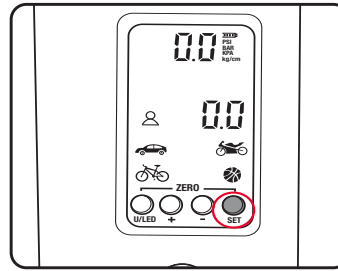


Pressure Setting

1. You can use the "+" and "-" buttons to change the desired air pressure up or down correct. To change the values faster, press and hold the respective button for a long time.

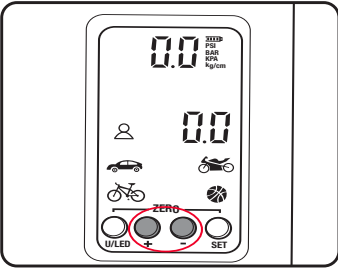


Inflating a product

1. Choose the product type, (ball in this example). The upper value on the screen displays the pressure of the connected item as it is being inflated.

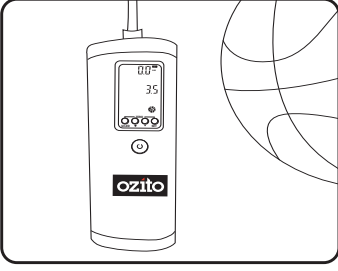


Note: The value of each product varies based on the present level of pressure.

2. Insert the ball adapter in ball air valve and read the displayed pressure.

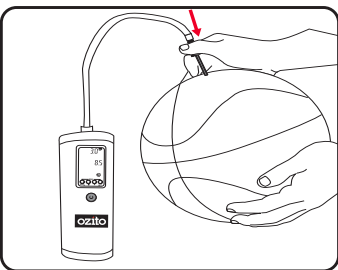

3. Start inflating by pressing the power button.

3. The unit will automatically shut off once the taret pressure has been reached.

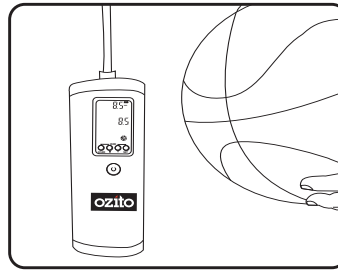


Note: Attach a suitable accessory to the air hose before using the inflator.

WARNING! DO NOT INFLATE THE OBJECT ABOVE THE RECOMMENDED INFLATION PRESSURE. THIS MAY LEAD TO DAMAGE AND/OR INJURIES.


Use as a USB Power Bank

1. The battery air pump can be used as a USB power bank. To do this, connect your Smartphone, using the associated charging cable with the USB-A output connector. As soon as your smartphone is fully charged or the battery capacity of the cordless air pump is too low, the loading process will be terminated automatically.

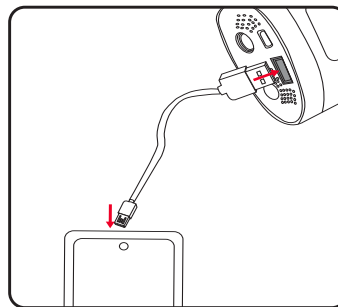

Use as a torch

1. To use the battery air pump as a lamp, hold down the "U/LED" button on mode, long press. The LED light will now start to glow. To exit this function, again hold the "U/LED" button pressed and the LED light goes out again.

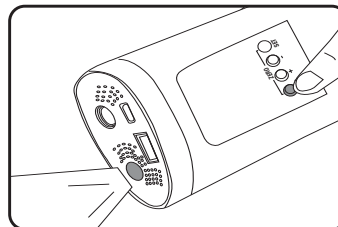


Note: This torch light source is not changeable.

WARNING! DO NOT USE CHARGER RATING MORE THAN 5V/1A.

Charging the Inflator

1. Connect provided charging cable to USB-C input connector of unit. Insert the other side of charging cable USB-A to associated 5V USB-A charger. The battery bar icon will stop flashing once battery is fully charged. Do not overcharge batteries. Do not exceed the maximum charging times

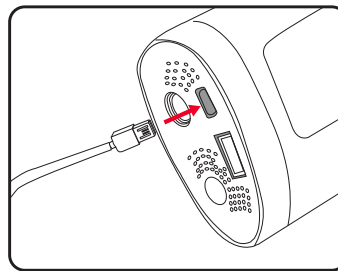

Note: Do not leave the charger unattended to charge.