

Low Level Submersible Pump FLTP 750-S

Art.-No.: **41.703.90**

Bar code: **4006825513677**

Sales unit: **4 pcs**


Ideal to empty flooded basements, tanks and containers, etc. The float switch controls the ON/OFF functions of the pump. **For low level up to 5 mm** the float switch can be fastened in continuous operation position.

The complete housing is made of an impact resistant material (plastic).

Technical Data:

- Mains: 230 V ~ 50 Hz
- Power: 750 watts
- Delivery capacity max.: 11000 l/h
- Delivery height max.: 9 m
- Immersion depth max.: 7 m
- Water temperature: up to 35 °C
- Mains cable: 10m H05RN-F
- Hose connection: 1 ¼" AG
- Immersion min.: 5 mm
- Weight: 6.2 kg
- Packing dimensions: 225 x 190 x 260 mm

Performance diagrams:

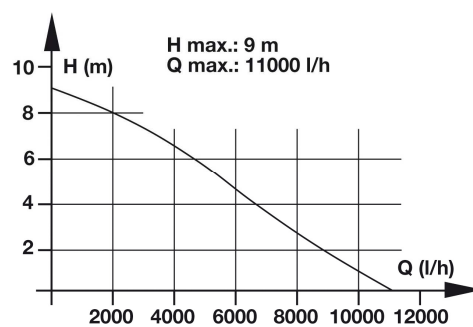

Features:

- Handle (1)
- Universal connection (2)
- Float switch (3)

