



Submersible Pump MTMP 255-S

Art.-No.: **41.702.88**

bar code: 4006825510195

sales unit: 4 pcs

Ideal to empty flooded basements, tanks and containers, etc. The installed float switch controls the ON/OFF functions of the pump.

High quality of the material i.e. stainless steel- driving gear, top quality axial face seal, screwed cable locks made of stainless steel warrant an almost corrosion-free and a long service life. The complete housing is made of an impact resistant material (plastic).

Technical data:


- Mains:	230 V ~ 50 Hz
- Power:	250 watts
- Delivery capacity max.:	6200 l/h
- Delivery height max.:	5.5 m
- Immersion depth max.:	5 m
- Water temperature:	up to 35°C
- Foreign particles size max.:	Ø 3 mm
- Mains cable:	10 m H05RN-F
- ON function:	ca. 50 cm
- OFF function:	ca. 5 cm
- Hose connection:	1 ¼" female thread
- Minimum immersion:	8 mm
- Weight:	4.3 kg
- Packing Dimensions:	240 x 175 x 310 mm

Features:

- Carrying handle (1)
- Universal connection for 1" and 1 ¼" hose connection as well as 1" male thread (2)
- 90 ° angle bracket with 1 ¼" x 1 ¼" male thread (3)
- Float switch (4)

Performance data:

Delivery height:	Delivery capacity:
1 m	max.: 4800 l/h
2 m	max.: 3600 l/h
3 m	max.: 2400 l/h
4 m	max.: 1500 l/h

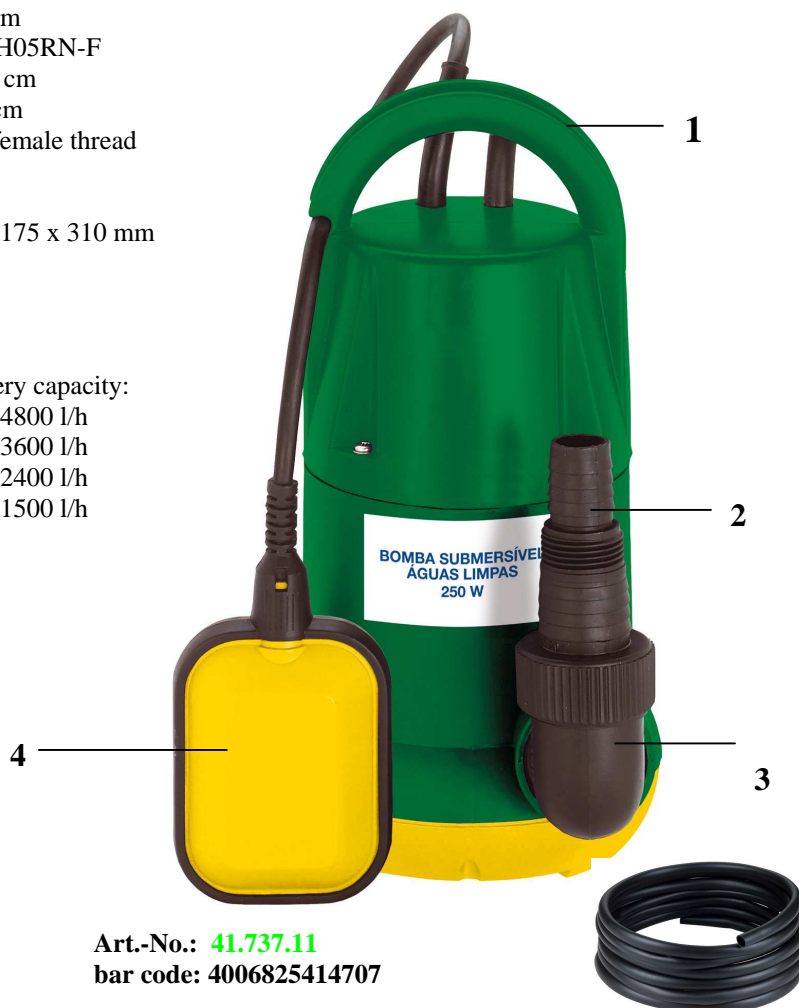

As special accessory available:

Drainage hose 10 m / 1" (material: PVC)

Art.-No.: **41.737.11**

bar code: 4006825414707

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: G:\Webshop\T-Produktbeschreibung\60\Originale_Englisch_PA04\4170288_01015.doc

Erstelldatum / create date: 25.05.2005 09:23

Aktualisiert / up dated: 13.06.2005