



CinHELL

BLUE

BT-EH 500 Electric Hoist

Art.-No. 22.555.30

- The start button is equipped with an emergency-cut-off button. This device guarantees a safe cut-off.
- The start button is designed in insulation class II (safety insulated).
- A forcibly actuated end switch assures that the hoist will safely be cut-off (roll up and roll off).
- Also in case of a defect on the pressure spring (i. e. rupture of the wire) stopping of the load is assured.
- The brake will be activated in case of power failure in the motor.
- The non-twisting steel rope prevents twisting of the loads during the lifting motion.
- The load hook with additional safety latch: This added latch prevents an unintended loosening of the load suspension device.
- The overload protection prevents the motor from overheating.

Features


- Fastening with 2 double clamps (1)
- Motor with thermal cut-off (2)
- 12 m steel wire rope (non-twisting) (3)
- Control switch with emergency button (4)
- Deflection pulley with payload hook (5)
- An automatic brake secures the load in any position

Technical Data

- Payload: 250 kg without pulley
500 kg with pulley
- Lifting height: 11.5 m without pulley
5.7 m with pulley
- Mains: 230 V ~ 50 Hz
- Power: 1,000 W S3 20 %
- Rope Ø: 4.00 mm
- Rope speed: without pulley: 8 m/min
with pulley: 4 m/min
- Product weight: 15.1 kg

Logistic Data

- Net weight: 16.2 kg
- Gross weight: 16.5 kg
- Packing dimensions: 401 x 247 x 155 mm
- Bar code: 4006825 584189
- Sales unit: 2 pcs

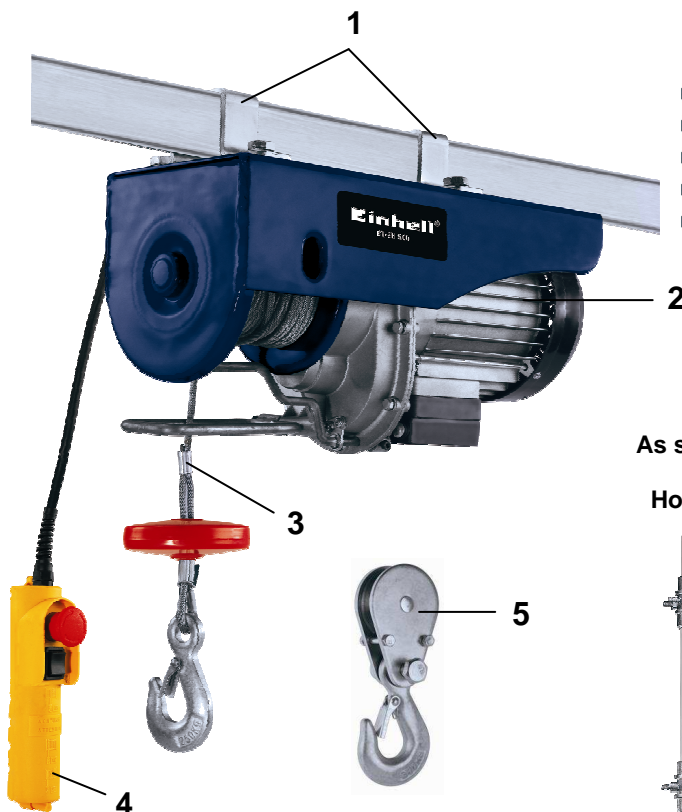

As special accessory available:

Hoist lever arm GT-SA 1200

Art.-No.: 22.553.98

Bar code: 4006825 540017

