

Versatile & powerful!

**Einhell**®

NEW GENERATION



The SB 1020/1 precision pillar drill is equipped with a V-belt drive, a continuously height-adjustable, tilting and laterally pivoting drilling table, a ball-raced drill spindle, an adjustable bottom stop, an ON/OFF switch with no-load function, a contact switch in the V-belt housing, and a folding eye shield. This model is serially supplied with a vice and a fast clamping drill chuck. **Drilling speed can be adjusted to meet the requirements of any material thanks to the 12-fold rotation speed graduation.**



Vice included



## SB 1020/1 W Pillar Drill

### Logistic Information:

<b>Type:</b>	<b>SB 1020/1 W</b>	<b>Sales unit:</b>	1 pc
<b>Art. No.:</b>	42.507.85	<b>20°:</b>	224 pcs
<b>Ident. No.:</b>	01027	<b>40°:</b>	446 pcs
<b>Bar Code:</b>	4006825 505009	<b>40° HC:</b>	-- pcs
<b>Packing:</b>	800x490x290 mm	<b>Weight:</b>	53.9 kgs (gross)




Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\4250785\_01027.doc  
Erstelldatum/create date: 12.12.2007 15:48:00Aktualisiert/up dated: 12.12.2007

# Versatile & powerful!

# Einhell®

## NEW GENERATION

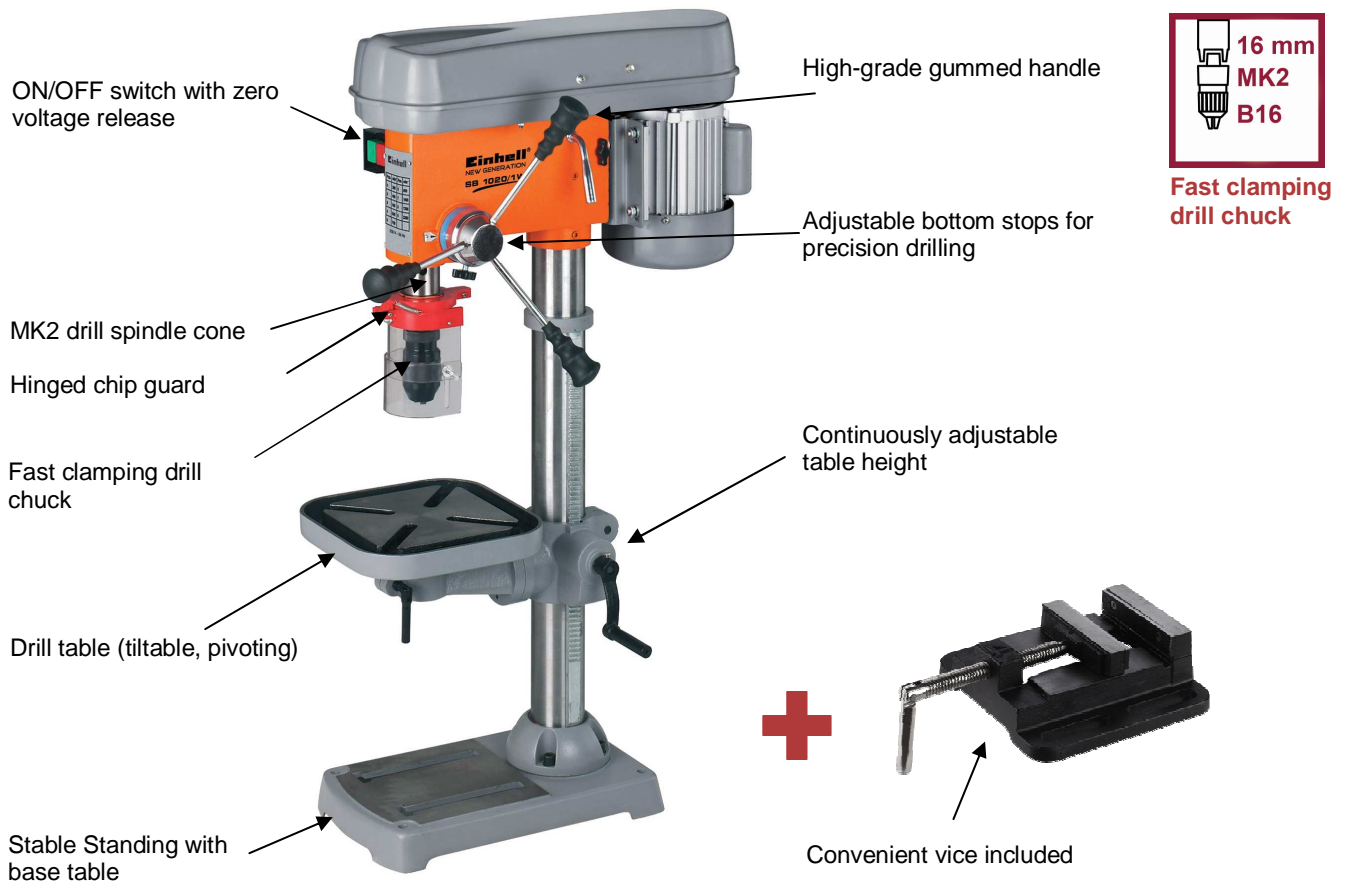

### Features:

- MK2 collet
- Fast clamping drill chuck
- Continuously adjustable table height
- Adjustable bottom stops for precision drilling
- 12-fold speed graduation 120-2,500 min<sup>-1</sup>
- Convenient vice included
- Ball-raced drill spindle
- Stable base table
- Drill table (tiltable, pivoting)
- ON/OFF switch with zero voltage releasing
- High-grade gummed handle

### Technical Data:

- Mains: 230 V ~50Hz
- Power: 700 watts (S2 15 min.)
- Motor speed: 1,400 min<sup>-1</sup>
- Spindle speed: 12 step 120 – 2,500 min<sup>-1</sup>
- Drill table tilt: -45° to + 45°
- Fast clamping drill chuck: Ø 3 to 16 mm
- Drill chuck mount: B16
- Drill spindle conus: MK 2
- Throat: 169 mm
- Max. drill depth: 80 mm
- Pillar diameter mm: 70 mm
- Size of base table: 405 x 240 mm
- Size of drill table: 260 x 260 mm
- Height: 1,010 mm

### Logistic Information:

<b>Type:</b>	<b>SB 1020/1 W</b>	<b>Tool:</b>	<b>Pillar Drill</b>
<b>Art. No.:</b>	42.507.85	<b>Sales unit:</b>	1 pc
<b>Ident. No.:</b>	01027	<b>20``:</b>	224 pcs
<b>Bar Code:</b>	4006825 505009	<b>40``:</b>	446 pcs
<b>Packing:</b>	800x490x290 mm	<b>40``HC:</b>	-- pcs
		<b>Weight:</b>	53.9 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen // Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten // Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\4250785\_01027.doc  
 Erstelldatum/create date: 12.12.2007 15:48:00Aktualisiert/up dated: 12.12.2007