The Einhell deep well pump GE-DW 1255 N-A with automatic function switches the device on and off automatically when water is required. Clear water can be pumped through the 8-stage impeller system up to a maximum height of 55 m. An immersion depth of max. 19 m and slim design also enable use in shallower and narrow water reservoirs. The 1200 W motor delivers 6,000 L/h. The stainless-steel housing and the high-quality mechanical seal guarantee durability. The dry-running cut-out protects the pump from damage. The pump is equipped with a hose connection on the top with an integrated non-return valve.
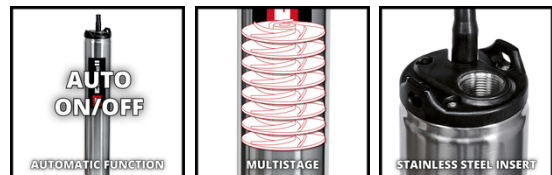
Features & Benefits

- Automatic function for automatic start/stop of the pump
- Integrated dry-running protection
- 8-stage impeller system for extra high delivery pressure
- High delivery pressure for irrigation, e.g. with sprinklers
- Stainless steel pump housing
- Stainless steel strainer
- With integrated non-return valve
- High-quality mechanical seal for a long service life
- Easily accessible hose connection on the top of the pump
- Pump diameter 98 mm for narrow shafts
- 22 m rope for easy lowering of the pump
- High immersion depth thanks to long power cable and cord
- Suspension eyelets for attaching the drain cable
- Robust pressure connection with stainless steel insert

Technical Data

- Mains supply	220-240 V | 50 Hz
- Power	1200 W
- Max. delivery capacity	6000 L/h
- Max. delivery height	55 m
- Max. immersion depth	19 m
- Max. water temperature	35 °C
- Max. size of foreign particles	0 mm
- Hose connection	33,3mm (G1 IG)
- Power cord	22 m | H07RN-F
- Pump diameter	98 mm

Logistic Data

- Product weight	10.15 kg
- Gross weight single packaging	15.4 kg
- Dimensions single packaging	226 x 220 x 950 mm
- Pieces per export carton	1 Pieces
- Gross weight export carton	15.4 kg
- Dimensions export carton	955 x 211 x 221 mm
- Container quantity (20"/40"/40"HC)	630 | 1260 | 1550

Generated at: 17.09.2024 07:41