



Submersible Pump RSP 2562/1

Art.-No.: 41.703.70

Bar code: 4006825 583113

Sales unit: 4 pcs

By the low weight the submersible pump is ideal to empty flooded basements, tanks and containers, etc. The pump is equipped with a float switch for automatic ON/OFF – operation for a varying water level. High quality standard at materials and constructional design, e. g. a stainless high-grade steel drive shaft warrants a maintenance-free operation and durable application. The housing is made of an impact resistant plastic.

Features

- Handle (1)
- Universal connection for ca. 25 mm (1") and ca. 32 mm (1 1/4") hose as well as ca. 33,3 mm (1") male thread (2)
- 90 ° angel bracket with ca. 42 mm (G1 1/4") x ca. 42 mm (G1 1/4") male thread (3)
- Float switch (4)




Technical data

- Mains: 230 V ~ 50 Hz
- Power: 250 W
- Delivery quantity max.: 6,200 l/h
- Delivery height max.: 5.5 m
- Immersions depth max.: 5 m
- Water temperatur max.: 35°C
- Foreign particle size up to: Ø 3 mm
- Mains cable length: 10 m
- ON function: approx. 50 cm
- OFF function: approx. 5 cm
- Connection hose: ca. 42 mm (G1 1/4") female thread
- Product weight: 3.8 kg

Logistic data

- Net weight: 3.9 kg
- Gross weight: 4.3 kg
- Packing dimensions: 195 x 195 x 300 mm
- Bar code: 4006825 583113
- Sales Unit: 4 pcs

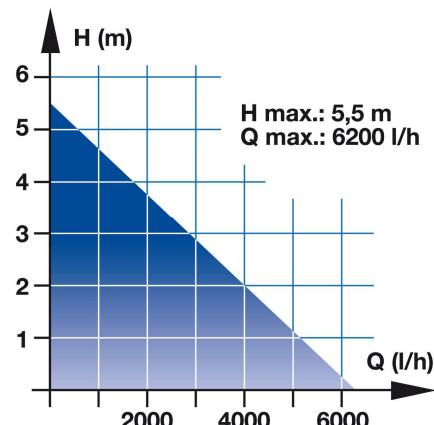

As special accessory available:

PVC-drainage hose 10 m/1"
Einhell Grey

Art.-No.: 41.737.14
Bar code: 4006825 549249

