

## Split-Air Conditioner SKA 2500

Art.-No.: 23.651.20

Bar-Code: 4006825234282

Sales unit: 1 pc

Air conditioner for wall installation.

**Automatic de-humidifying of air in a room**

**Complete with remote controlled transmitter** and 4 m connecting copper tubes with flexible insulation (max. 15 m possibly)

**Time programming device for ON/OFF.**

Easy installation of the air conditioner with a cooling capacity of **2500 watts**. Ideal for rooms until ca. 84 m<sup>3</sup>.

The unit consists of 2 parts, an outdoor part and one for indoors, in order to allow quick cooling and warrant an optimal noise level.

3 setting of fan speed with a maximum speed of 420 m<sup>3</sup>/h.

With the **automatic de-humidification** the units evaporates from its surrounding approx **0,8 l/h** of excess humidity.

**Timer for programme settings, Automatic- and night functions.**

All functions can be set with the **remote controlled transmitter**. Supplied with LCD indicator. Motorized ventilation lamella in the indoor unit.

### Dimensions:

Indoor (WxHxD): 770 x 250 x 180 mm

Outdoor unit (WxHxD): 830 x 545 x 255 mm

### Weight:

Indoor unit: 8 kg

Outdoor unit: 32 kg

Weight gross: 48 kg

**Packing dimensions compl.** 1020 x 490 x 90 mm


### Features:

- Air suction grid (1)
- Air escape plate fin (2)
- Infrared receiver (3)
- LCD display (4)
- Remote control (5)
- Pipe connection (6)
- Fan (7)

### Technical data:

- Free of FCKW (R407C)
- Energy-Efficiency-Class: B
- EER / COP: 3.07 / -
- Energy consumption when cooling: 415 kWh per year
- Cooling capacity: 2500 watts
- Air throughput: 420 m<sup>3</sup>/h
- Capacity of humidity reduction: 0.8 l/h
- Mains: 230 V ~ 50 Hz
- Refrigerant quantity: approx. 780 g for 4 m of tube (for each metre add 20 g more coolant)
- Noise level: Indoors: 38 dB (A)  
Outdoors: 53 dB (A)

Characteristics according to EN 14511

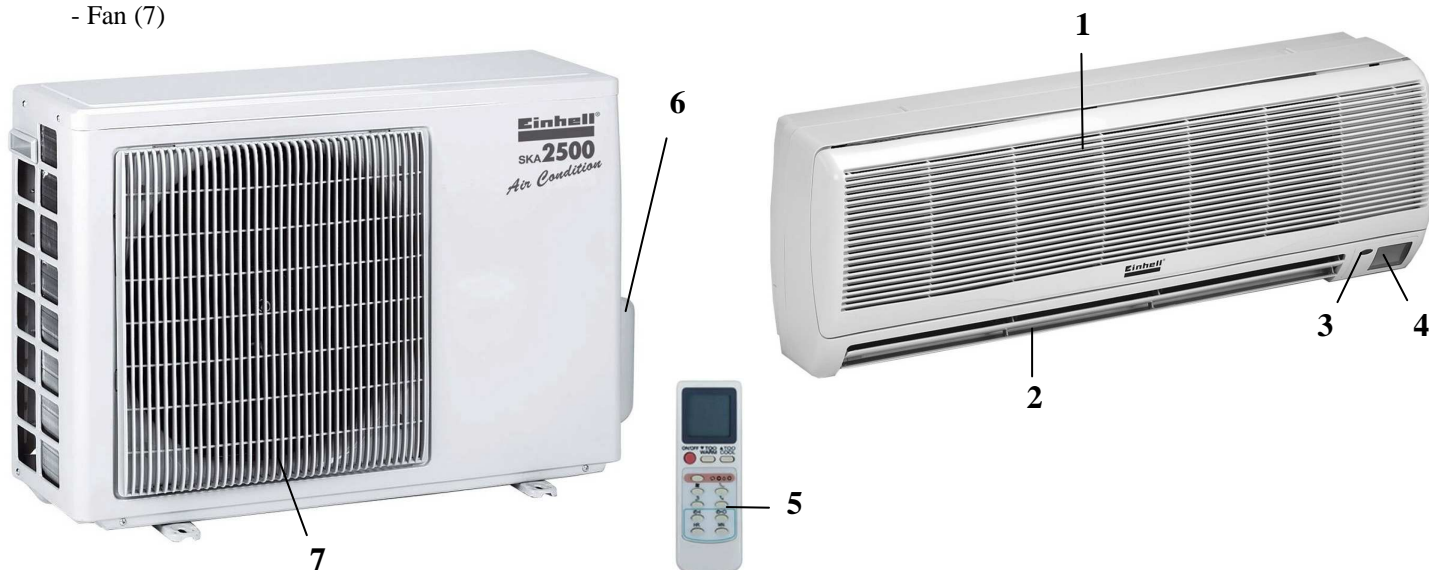

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\2365120\_01033.doc

Erstelldatum / create date: 12/12/2001 08:57:00

Aktualisiert / up dated: 14/07/2006