


Many-sided and precise!

Einhell®

NEW GENERATION



The NTK 1200 table saw has been designed for multi-purpose applications including ripping and crosscuts of lumber, chipboard, plywood, multiplex board and veneered board. The saw can be tilted up to 45° for mitre cuts. Thanks to its compact construction the circular saw is ideal for mobile applications. The parallel stop with two stopping heights guarantees precise cuts.



NTK 1200 Table Saw

Available as special accessory:

Carbide tipped saw blade:
Ø 210 x Ø 30 mm 24 teeth

Art.-No.: 45.020.48
Ident-No.: 01013
Bar-Code: 4006825 456004



Carbide tipped saw blade:
Ø 210 x Ø 30 mm 48 teeth

Art.-No.: 45.020.34
Ident-No.: 01023
Bar-Code: 4006825 456110



CV-Saw blade:
Ø 210 x Ø 30 mm 72 teeth

Art.-No.: 45.020.42
Ident-No.: 01013
Bar-Code: 4006825 456042



Logistic Information:


Type:	NTK 1200	Sales unit:	1 pcs
Art.-No.:	43.407.40	20`:`:	308 pcs
Ident-No.:	01015	40`:`:	644 pcs
Bar Code:	4006825 516296	40``HC:	730 pcs
Packing:	575 x 490 x 320 mm	Weight:	16,5 kg (gross)



Many-sided and precise!

Einhell®

NEW GENERATION

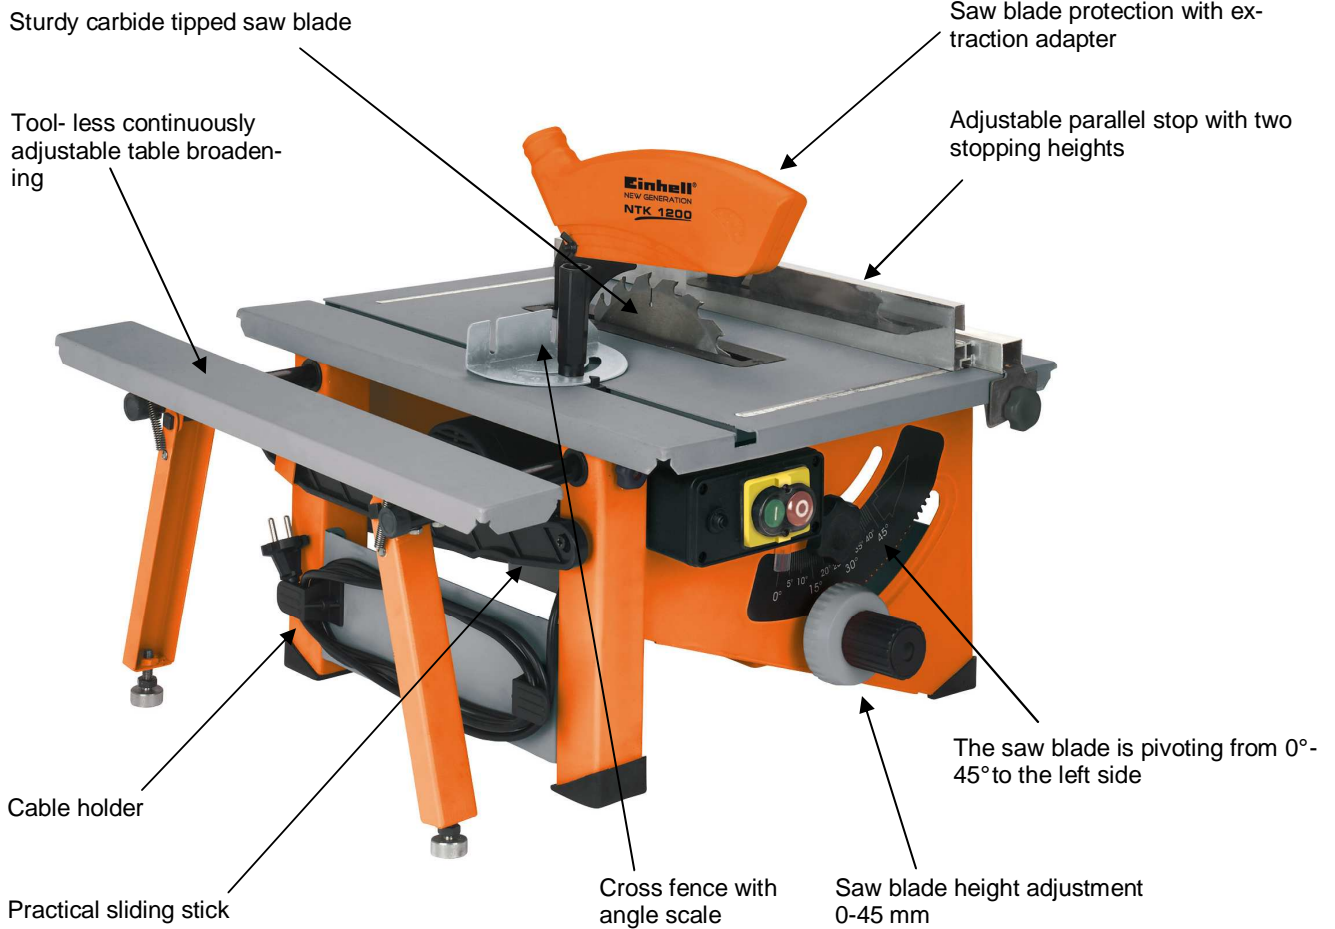

Features:

- Tool-less continuously adjustable table broadening
- The saw blade is pivoting from 0°- 45° to the left side
- Saw blade height adjustment 0-45 mm
- Adjustable parallel stop with two stopping heights
- Cross fence with angle scale (-60°+60°)
- Saw blade protection with extraction adapter
- Practical sliding stick

Technical Data:

- | | |
|------------------------------------|-------------------------|
| - Mains: | 230 V ~ 50 Hz |
| - Power: | 1200 watts |
| - Idle speed n_0 : | 4500 min ⁻¹ |
| - Carbide-tipped saw blade: | Ø 210 x Ø x 30 x 2,5 mm |
| - No. of teeth: | 20 |
| - Cutting height 90°/45° max.: | 45 mm / 41 mm |
| - Table size: | 525 x 400 mm |
| - Table size max. with broadening: | 525 x 620 mm |
| - Adapter for dust extraction: | Ø 36 mm |

Logistic Information:

Type:	NTK 1200	Tool:	Table saw
Art.-No.:	43.407.40	Sales unit:	1 pcs
Ident-No.:	01015	20°:	308 pcs
Bar Code:	4006825 516296	40°:	644 pcs
Packing:	575 x 500 x 320 mm	40° HC:	730 pcs
		Weight:	-- kg (gross)

