



The powerful and robust submersible pump for draining garden ponds, flooded basements and construction sites.

Capable of handling foreign particles up to Ø 35mm in size.


Equipped with a continuously adjustable float switch for infinitely variable control of the ON/OFF switching height and operation differential. Option of arresting the float switch for continuous operation.

E-STP 8517 Submersible pump

Logistic Information:

Type:	E-STP 8517	Sales unit:	1 pc
Art. No.:	41.706.25	20`:`:	1,520 pcs
Ident. No.:	01018	40`:`:	3,200 pcs
Bar Code:	4006825551334	40``HC:	3,680 pcs
Packing:	173 x 220 x 440 mm	Weight:	6.45 kg (net)
		Weight:	7.25 kg (gross)



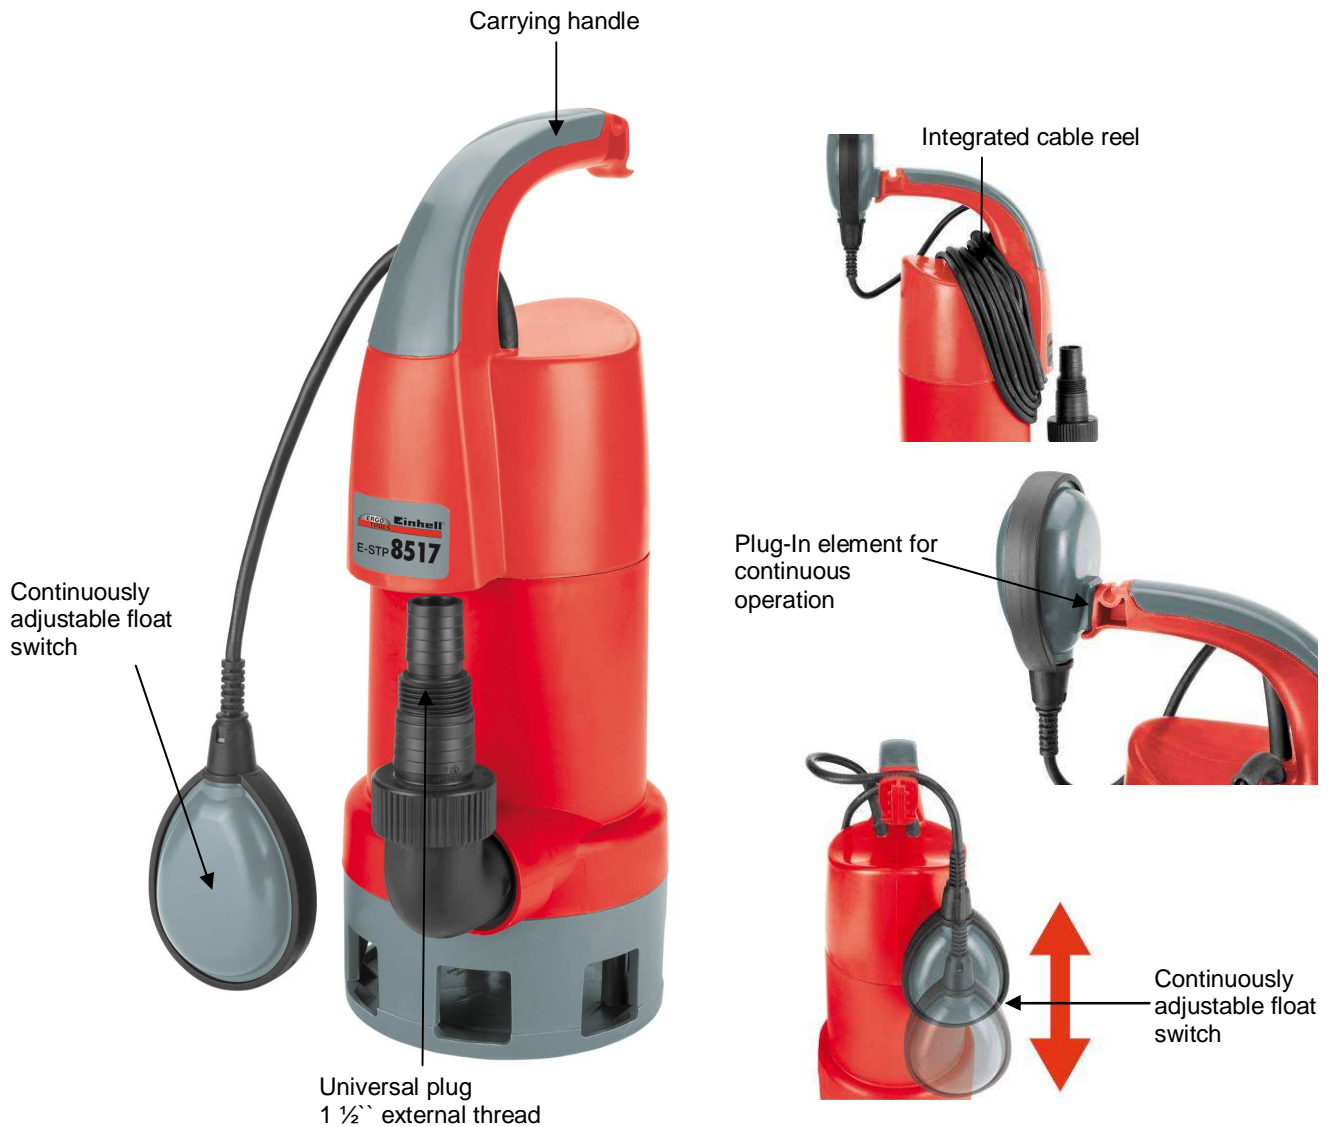

Features:

- Carrying handle with integrated cable reel
- Continuously adjustable float switch
- Housing made of impact resistant, high quality plastics
- Handles impurities with grain sizes up to 35 mm
- Universal plug 1 1/2" external thread

Technical Data:

- Voltage: 230 V ~ 50 Hz
- Power: 850 watts
- Delivery capacity max.: 17,000 l/h
- Delivery height max.: 9 m
- Immersion depth max.: 5 m
- Hose connection: 1 1/2"
- Water temperature max.: 35 °C
- Main cable length: 10 m
- Foreign particles size: Ø 35 mm

Logistic Information:

Type:	E-STP 8517	Tool:	Submersible pump
Art. No.:	41.706.25	Sales unit:	1 pc
Ident. No.:	01018	20" :	1,520 pcs
Bar Code:	4006825551334	40" :	3,200 pcs
Packing:	173 x 220 x 440 mm	40" HC:	3,680 pcs
		Weight:	6.45 kg (net)
		Weight:	7.25 kg (gross)

