



CinHELL

BLUE


BT-BO 25 A SP Booster cable

Art.-No. 20.311.15

Booster cable tested according to DIN 72553.

Features

- **Surge protection against injurious tension points at jumpstart (1)**
- 4 all-insulated pole-pliers according to DIN (12-24 V) (2)
- Conductive material made of copper coated 40 mm² aluminium core (\pm 25 mm² copper cable)
- incl. carrying bag

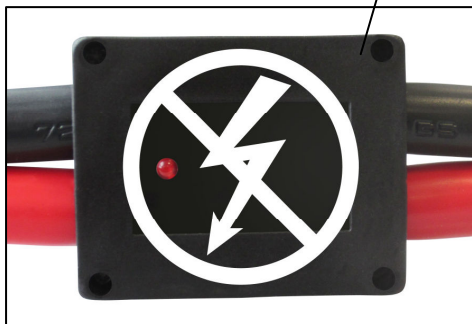

Technical Data


- For gasoline engines up to max.: 5,500 ccm
- For diesel engines up to max.: 3,000 ccm
- Length: 3.5 m
- Cable cross section: 40 mm²
- Testing current: 350 A
- Product weight: 2.0 kg

Logistic Data


- Net weight: 2.0 kg
- Gross weight: 2.1 kg
- Packing dimensions: 320 x 320 x 50 mm
- Bar code: 4006825 596380
- Sales unit: 6 pcs




3.5 m



40 mm²



12 / 24 V



Benzin/ Gasolin:
max. 5,500 ccm
Diesel:
max. 3,000 ccm

