





RED

RG-DP 8535

Submersible Pump


The powerful and robust submersible pump for draining garden ponds, flooded basements and construction sites. Capable of handling foreign particles up to \varnothing 35mm in size.

Equipped with a continuously adjustable float switch for infinitely variable control of the ON/OFF switching height and operation differential. Option of arresting the float switch for continuous operation.

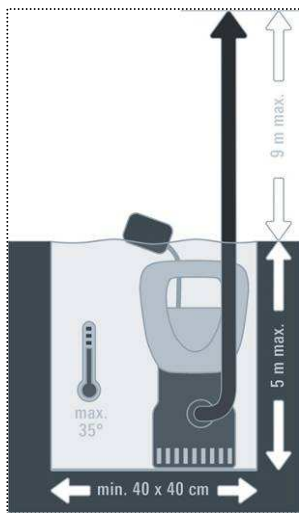

Features

- Carrying handle with integrated cable reel
- Continuously adjustable float switch
- Housing made of impact resistant, high quality plastics
- Handle impurities with grain sizes up to 35 mm
- Universal plug G 1 1/2 (ca. 47.8 mm) male thread

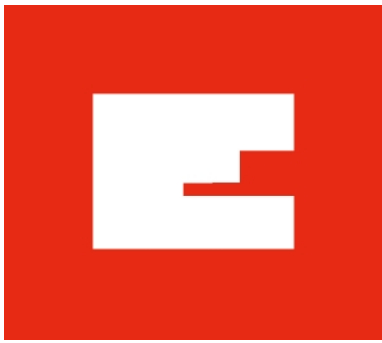

RED

RG-DP 8535 Submersible Pump



Continuously adjustable float switch


Continuously adjustable float switch

Integrated cable reel

Carrying handle

Plug
G 1 1/2 (ca. 47.8 mm)
male thread

Performance data:

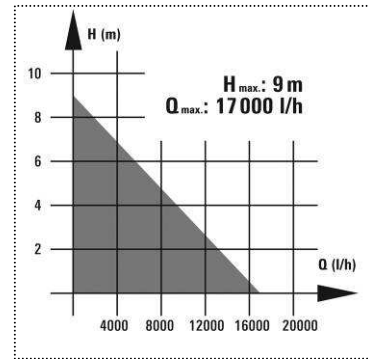

Logistic Information

Typ:	RG-DP 8535
Art.-No.:	41.706.24
Ident-No.:	01018
Bar code:	4006825 549386
Packaging:	240 x 195 x 415 mm
Sales unit:	4 pcs
20'':	1,400 pcs
40'':	2,900 pcs
40'' HC:	2,900 pcs
Net weight:	6.76 kg
Gross weight:	7.16 kg

Technical Data

■ Voltage:	230 V ~ 50 Hz
■ Power:	850 W
■ Delivery capacity max.:	17.000 l/h
■ Delivery height max.:	9 m
■ Imersion depth max.:	5 m
■ Universal plug:	G 1 1/2 (ca. 47.8 mm) female thread
■ Water temperature max.:	35 °C
■ Main cable length:	10 m
■ Foreign particles size:	Ø 35 mm