

ozito

AIRBRUSH & MINI COMPRESSOR KIT


3L 105W

INSTRUCTION MANUAL


SPECIFICATIONS

Input:	220-240V ~ 50Hz
Power:	105W
Tank Capacity:	3L
No Load Speed:	1,400/min
Max. Pressure:	4bar (58psi)
Auto Cut-In Pressure:	3bar (43.5psi)
Flow Rate:	15L/min
Weight:	5.32kg


ozito.com.au

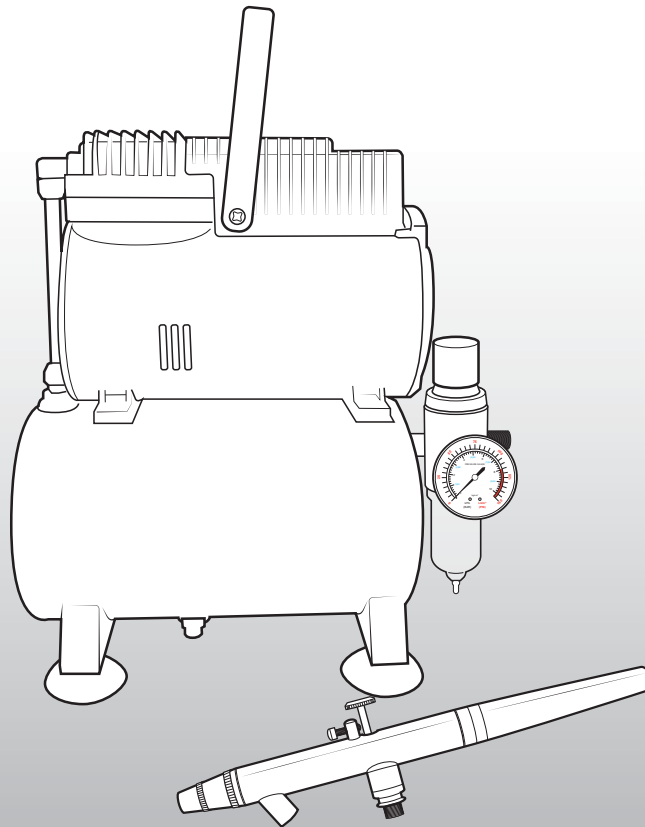

STANDARD EQUIPMENT




3L Mini Air Compressor



Airbrush



Paint Cup & 2 x Paint Pots



1.8m Air Hose, Airbrush Holder & Spanner

3 YEAR REPLACEMENT WARRANTY

MACK-300

WARRANTY

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO YOUR NEAREST BUNNINGS WAREHOUSE WITH YOUR BUNNINGS REGISTER RECEIPT. PRIOR TO RETURNING YOUR PRODUCT FOR WARRANTY PLEASE TELEPHONE OUR CUSTOMER SERVICE HELPLINE:

Australia 1800 069 486

New Zealand 0508 069 486

TO ENSURE A SPEEDY RESPONSE PLEASE HAVE THE MODEL NUMBER AND DATE OF PURCHASE AVAILABLE. A CUSTOMER SERVICE REPRESENTATIVE WILL TAKE YOUR CALL AND ANSWER ANY QUESTIONS YOU MAY HAVE RELATING TO THE WARRANTY POLICY OR PROCEDURE.

The benefits provided under this warranty are in addition to other rights and remedies which are available to you at law. Our goods come with guarantees that cannot be excluded at law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Generally you will be responsible for all costs associated with a claim under this warranty, however, where you have suffered any additional direct loss as a result of a defective product you may be able to claim such expenses by contacting our customer service helpline above.

3 YEAR REPLACEMENT WARRANTY

Your product is guaranteed for a period of **36 months from the original date of purchase**. If a product is defective it will be replaced in accordance with the terms of this warranty. Warranty excludes consumable parts, for example: valve adapters and accessories.

WARNING


The following actions will result in the warranty being void.

- If the tool has been operated on a supply voltage other than that specified on the tool.
- If the tool shows signs of damage or defects caused by or resulting from abuse, accidents or alterations.
- Failure to perform maintenance as set out within the instruction manual.
- If the tool is disassembled or tampered with in any way.
- Professional, industrial or high frequency use.

KNOW YOUR PRODUCT


MINI AIR COMPRESSOR

1. Safety Relief Valve
2. On/Off Switch
3. Pressure Regulator Dial
4. Air Outlet
5. Pressure Gauge
6. Moisture Trap
7. Rubber Feet
8. Drain Valve
9. Air Tank
10. Motor
11. Carry Handle

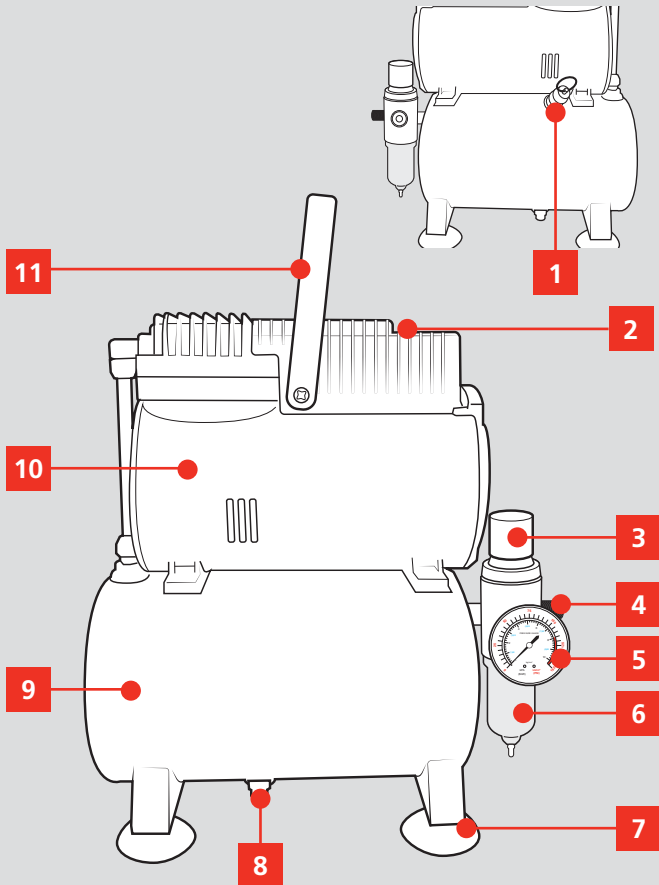

AIRBRUSH

12. Nozzle Cap
13. Tip Protector
14. Paint Regulator Screw
15. Variable Trigger
16. Barrel Housing
17. Air Inlet
18. Paint Inlet

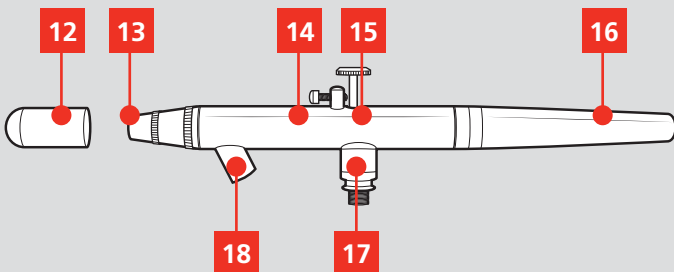

ONLINE MANUAL

Scan this QR Code with your mobile device to take you to the online manual.




SETUP & PREPARATION

1. ASSEMBLY

⚠ WARNING! ENSURE THE TOOL IS TURNED OFF AND DISCONNECTED FROM THE POWER SUPPLY BEFORE PERFORMING ANY OF THE FOLLOWING OPERATIONS.


Connecting The Airbrush To The Compressor

1. Attach one end of the air hose to the compressor air outlet.
2. Attach the other end of the air hose to the airbrush air inlet.

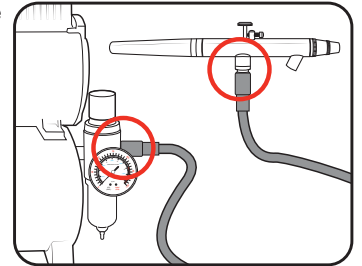

Installing A Paint Pot To The Airbrush

1. Attach the lid with the intake nozzle securely to the paint pot.
2. Push the intake nozzle securely into the paint inlet of the airbrush.

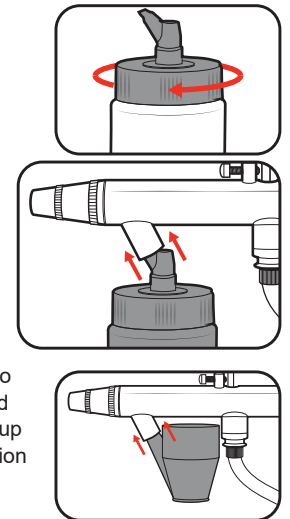


Note: Alternatively the paint cup can also be attached for small paint jobs. To avoid accidental spillage, do not fill the paint cup more than 60% and adjust the cup position as required.

Hanging Hook

The provided hanging hook can be used to rest the airbrush if you need to pause midway through airbrushing.

1. Attach the hanging hook to a wall using 2 screws (not supplied).
2. Place the airbrush on the hanging hook when not in use.



3 YEAR REPLACEMENT WARRANTY

OPERATION


2. PAINT PREPARATION

WARNING! THE AIRBRUSH CANNOT BE USED WITH MATERIALS CONTAINING ABRASIVE SUBSTANCES, GLAZES, CAUSTIC AND/OR ALKALINE SUBSTANCES.

Thinning Paints

Surface preparation and proper paint thinning are the two most important steps for best results. Ensure all surfaces are free of dust, dirt and grease.

The airbrush kit comes with a spare paint pot and lid that can be used for mixing or thinning the paint until the desired colour and viscosity is achieved.




Follow the paint manufacturer's guide for thinning and mixing ratios. Use the appropriate thinning agent for paints.

Water based paints can be thinned using water.


1. Before mixing any paint or thinners, work out how much of each substance is needed.

2. Pour the required amount of paint into the paint pot.



3. Pour the necessary amount of thinner into the paint pot.

4. Thoroughly mix the paint and thinning agent in the paint pot and then attach the lid securely.




Note: Refer to the troubleshooting section if there are issues with the paint spread.


3. AIRBRUSH

Variable Trigger

1. Press and hold the variable trigger down. This allows air to start flowing through the airbrush.



2. Pull the variable trigger backwards to allow paint to be sprayed.




Note: The further back the variable trigger is pulled, the more paint is sprayed out of the airbrush.

3. Release the variable paint trigger to stop spraying.

Paint Regulator Screw

The paint regulator screw is a stop that holds the variable trigger backwards. This allows a set amount of paint to be sprayed when the trigger is depressed.

1. Loosen the regulator screw entirely for full control over the amount of paint sprayed.




2. Tighten the regulator screw until the desired amount of paint is ejected when the trigger is pressed down.

Note: Always test spray on a scrap piece of material every time an adjustment is made to the settings.


Paint Pot Vent Hole

The paint pot lid with the intake nozzle has a vent hole which allows air into the pot. This enables fluid to flow into the airbrush. Ensure it is clean and not blocked.



Nozzle Cap

Push the cap over the nozzle of the airbrush when not in use to protect it.



Note: Avoid rotating the nozzle cap when removing it, as this may unscrew the nozzle.


4. COMPRESSOR CONTROLS

WARNING! THE POWER SUPPLY FOR THIS PRODUCT SHOULD BE PROTECTED BY A RESIDUAL CURRENT DEVICE (RATED AT 30mA OR LESS).

WARNING! HOUSING SURFACE MAY GET HOT DURING USE. DO NOT TOUCH THE HOUSING WHEN HOT, ONLY HANDLE USING THE CARRY HANDLE PROVIDED.

Starting The Air Compressor

1. Press the on/off switch to the 'I' position to start the compressor.



Note: The air compressor is designed to turn off at 4bar and turn on when the air pressure drops to 3bar.

2. To stop the unit, press the on/off switch to the '0' position.


WARNING! COMPRESSED AIR IS DANGEROUS. NEVER POINT THE AIR OUTLET OF CONNECTED ACCESSORIES AT ANY PART OF YOUR BODY OR OTHER PEOPLE AND ANIMALS.

Checking The Safety Relief Valve


The safety relief valve has been set for the highest permitted pressure of the tank. It is prohibited to adjust the safety relief valve or to remove its seal. **Check that the safety relief valve is in working order before every use.**

WARNING! WEAR SAFETY GLASSES AND EAR PROTECTION. KEEP YOUR FACE AWAY FROM THE SAFETY VALVE WHEN CARRYING OUT THIS CHECK. AIR WILL BE DISCHARGED AT HIGH PRESSURE. DO NOT USE THE COMPRESSOR IF THE SAFETY VALVE DOES NOT WORK AS DESCRIBED.

1. Turn the compressor on and let it run until the switch off pressure (4bar) is reached.



2. Hold the ring on the safety relief valve and pull it outwards. Air should discharge from the valve.




3. When the ring on the safety relief valve is released, the air discharge should stop.

Adjusting The Pressure


The airbrush has an operating pressure between 1-4bar. The compressor pressure needs to be adjusted to suit this before operating the airbrush.

The correct air pressure between this operating range will produce an even spray pattern with little to no splatter.


1. Once the air compressor is switched on, the pressure gauge will show the regulated air pressure.




2. Lift the pressure regulator dial to unlock it.




3. Perform a test spray onto a scrap piece of material and rotate the pressure regulator dial until the desired setting is achieved. Turning the dial clockwise will increase the air pressure, whilst turning it anti-clockwise will decrease the air pressure.

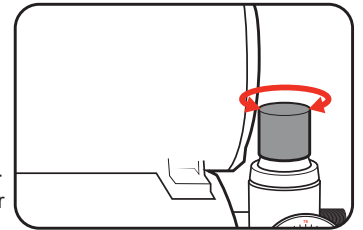

4. Keep adjusting the pressure regulator dial until an even spray pattern with little to no paint splatter is achieved.



5. Once the desired pressure is set, press the regulator dial down and twist it clockwise slightly to lock it in position.



5. AIRBRUSHING TECHNIQUE




WARNING! THE AIRBRUSH MUST BE CLEANED AFTER EACH USE TO PREVENT IT GETTING CLOGGED. PLEASE REFER TO THE MAINTENANCE SECTION. FAILURE TO CLEAN IT AFTER USE WILL VOID THE WARRANTY.

Painting Tips

1. Start spraying just before the start of the paint area and end just after to ensure a consistent spray on the edges. Mask off any areas that you don't want painted.
2. Move the spray gun along the surface at a steady pace whilst maintaining the distance and angle to ensure an even coverage.
3. Overlap each pass over the paint area to achieve an even coating.
4. Airbrushing also has a range of techniques to obtain different effects. Below are some basic effects which can be achieved by varying the painting motion and distance from the workpiece.

Varying The Distance


Positioning the airbrush close to the workpiece will produce a small dense spray pattern.



Moving the airbrush further away from the workpiece produces a wide, faint pattern.

Angling The Airbrush

Holding the airbrush at an angle to the workpiece produces a fan shaped spray.



6. TROUBLESHOOTING

Symptom	Possible Cause	Suggested Solution
The compressor is overheating	The air vents may be obstructed, restricting air flow.	Ensure the air vents are free from obstructions.
Little or no material flow	Nozzle may be clogged.	Clean the nozzle
	Paint pot vent hole may be blocked	Clean the paint pot lid
	Paint too thick	Follow directions for thinning the paint.
Spray pattern is heavy in the middle	Nozzle clogged	Clean the nozzle
	Not enough atomising pressure	Increase the air pressure by adjusting the pressure regulator dial
Spray pattern is too wide and misty	Too much atomising pressure	Decrease the air pressure by adjusting the pressure regulator dial
Spray jet pulsates	Material in paint pot running out	Refill the paint
	Nozzle clogged	Clean or replace the nozzle
	Material is too thick	Follow directions for thinning the paint.
Pattern runs or sags	Applying too much material	Pull the variable trigger back less or increase movement speed of the airbrush
Too much over spray	Gun too far from spray object	Hold the airbrush closer to workpiece
	Too much atomising pressure	Decrease the air pressure by adjusting the pressure regulator dial
Pattern is very light & splotchy	Moving the airbrush too fast	Pull the variable trigger back further or decrease movement speed of the airbrush

MAINTENANCE


WARNING! BEFORE CLEANING THE TOOL OR CARRYING OUT ANY MAINTENANCE PROCEDURE, MAKE SURE THAT IT IS DISCONNECTED FROM THE POWER SUPPLY TO PREVENT ACCIDENTAL STARTING.

WARNING! IT IS ESSENTIAL TO CLEAN THE AIRBRUSH THOROUGHLY AFTER EACH USE. DRIED PAINT CAN CAUSE BLOCKAGES THAT WILL PREVENT THE TOOL FROM WORKING. FAILURE TO CLEAN THE TOOL AFTER EACH USE WILL VOID THE WARRANTY.


Cleaning The Airbrush

Follow the procedure below when changing between different paints and spray materials.

1. Remove the paint pot from the airbrush, then empty and remove any remaining paint.



2. Fill the paint pot with the appropriate solvent; water for water based paints and the appropriate cleaning solution for oil based paints.




Note: Read the cleaning instructions provided by the paint manufacturer to determine the appropriate cleaning solvent.

WARNING! ALWAYS READ AND FOLLOW THE MANUFACTURER'S INSTRUCTIONS FOR HANDLING AND USE OF THE SOLVENTS. SOME SOLVENTS MAY BE TOXIC AND APPROPRIATE SAFETY MEASURES MUST BE STRICTLY FOLLOWED TO AVOID SAFETY HAZARDS.

WARNING! KEEP THE TOOL AWAY FROM CHILDREN. SMALL PARTS ON THE TOOL CAN BE SWALLOWED AND POSE A SERIOUS SAFETY HAZARD.


3. Re-attach the paint pot to the airbrush.

4. Switch on the air compressor and spray the solvent through the airbrush onto a scrap piece of material.



5. Repeat steps 2-4 until the solvent sprayed out of the airbrush runs clear.

6. Switch off the air compressor, remove the paint pot and rinse it out with the appropriate solvent.




Note: Do not pour solvent or contaminated water down the drain as doing so could pollute our water system. Always dispose of waste material in an appropriate and responsible manner. Always refer to paint manufacturer's guide for correct disposal methods.


Cleaning The Airbrush for Storage

Perform the procedure below when you have finished airbrushing before putting the tool away.


1. Remove the barrel housing and needle lock.

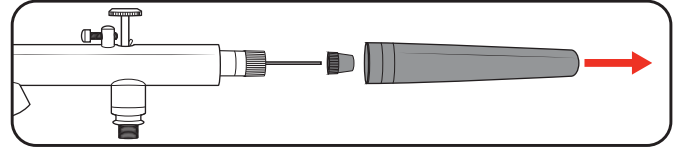

2. Disassemble the tip protector and nozzle with the supplied spanner. Clean these parts with the appropriate solvent.

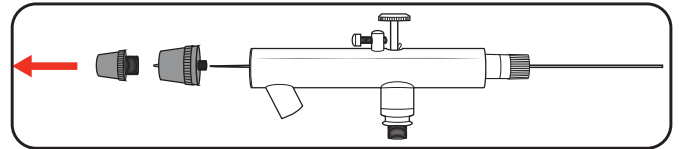


3. Pull the needle through the front of the airbrush. Clean the needle with the appropriate solvent.

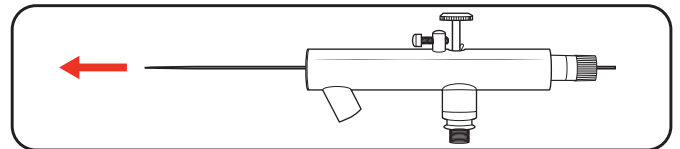

WARNING! THE NEEDLE IS VERY SHARP. BE CAREFUL NOT TO INJURE YOURSELF.

WARNING! DO NOT DAMAGE THE NEEDLE AS THIS WILL AFFECT THE PERFORMANCE OF THE AIRBRUSH AND QUALITY OF THE OUTPUT.

4. Remove and clean the rest of the barrel parts.

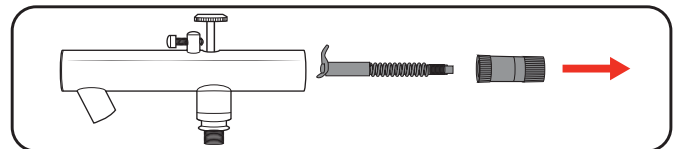






5. Once the parts are dry and clean of paint, reassemble the airbrush and replace the nozzle cap before storing.

Note: When re-assembling, attach the remaining barrel parts, the tip protector and nozzle first, then push the needle into the barrel from the rear until the sharp end is flush with the nozzle. There is a hole in the stem of the trigger; the needle should pass through this during re-assembly.

General Cleaning & Maintenance

1. We recommend that you clean the appliance immediately after you use it.
2. Keep the safety devices free of dirt and dust as much as possible. Wipe the equipment with a clean cloth.
3. Clean the appliance regularly with a damp cloth and some soft soap. Do not use cleaning agents or solvents; these may be aggressive to the plastic parts in the appliance. Ensure that no water can get into the interior of the appliance.

DESCRIPTION OF SYMBOLS


V	Volts	Hz	Hertz
~	Alternating Current	W	Watts
/min	Revolutions or reciprocations per minute	n₀	No load speed
L/min	Litres per minute	bar	Pressure rating
	Regulatory Compliance Mark (RCM)		Wear eye, ear & breathing protection
	Do not expose to rain		Warning
	Read Instruction Manual		

Draining The Compressor Tank


Air in the compressor tank causes water to accumulate. This must be drained off frequently to prevent corrosion and damage to the unit.

This should be performed after each use and prior to the next use.

1. With the compressor turned off, point the airbrush nozzle away from people and pull the trigger to release any leftover compressed air in the tank.



2. Once no more air is released from the airbrush nozzle, unscrew the plug from the drain valve to release any water from the tank.



3. Allow the tank to drain completely before replacing the drain valve plug.

Note: Ensure the drain valve plug is replaced correctly and tightened fully before using the air compressor again.



WARNING! RELEASE ALL AIR PRESSURE FROM THE TANK BEFORE OPENING THE DRAIN VALVE. TAKE CARE WHEN DISCHARGING AIR THROUGH THE AIR OUTLETS. THE DISCHARGED AIR CAN CAUSE DUST, STONES, OR ANY OTHER FOREIGN PARTICLES TO BE BLOWN THROUGH THE AIR AT HIGH PRESSURE.

Storage

Pull the mains plug out of the socket, switch off the tool and make sure that it is secured in such a way that it cannot be started up again by any unauthorised person.

Store the tool in a dry location which is not accessible to unauthorised persons.

Supply Cords

If replacement of the supply cord is necessary, this has to be done by the manufacturer or his agent in order to avoid a safety hazard.

Note: Ozito Industries will not be responsible for any damage or injuries caused by the repair of the tool by an unauthorised person or by mishandling of the tool.

CARING FOR THE ENVIRONMENT



Power tools that are no longer usable should not be disposed of with household waste but in an environmentally friendly way. Please recycle where facilities exist. Check with your local council authority for recycling advice.



Recycling packaging reduces the need for landfill and raw materials. Reuse of recycled material decreases pollution in the environment. Please recycle packaging where facilities exist. Check with your local council authority for recycling advice.

SPARE PARTS

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse.


For further information, or any parts not listed here, visit www.ozito.com.au or contact Ozito Customer Service:

Australia 1800 069 486

New Zealand 0508 069 486

E-mail: enquiries@ozito.com.au

ELECTRICAL SAFETY

 **WARNING!** When using mains-powered tools, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, personal injury and material damage.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool.

Save these instructions and other documents supplied with this tool for future reference.

The charger has been designed for 230V and 240V only. Always check that the power supply corresponds to the voltage on the rating plate.

Note: The supply of 230V and 240V on Ozito tools are interchangeable for Australia and New Zealand.


If the replacement of the supply cord is necessary, this has to be done by the manufacturer or his agent in order to avoid a safety hazard.

Using an Extension Lead

Always use an approved extension lead suitable for the power input of this tool. Before use, inspect the extension lead for signs of damage, wear and ageing. Replace the extension lead if damaged or defective. When using an extension lead on a reel, always unwind the lead completely. Use of an extension lead not suitable for the power input of the tool or which is damaged or defective may result in a risk of fire and electric shock.

The power supply for this products charger should be protected by a residual current device (rated at 30mA or less). A residual current device reduces the risk of electric shock.

GENERAL POWER TOOL SAFETY WARNINGS

 **WARNING!** Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

1. Work area safety

- Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
- Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.

When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

2. Electrical safety

- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
- Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
- Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.


When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

3. Personal safety

- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- Use personal protective equipment. Always wear eye protection.** Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

- Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
 - Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
 - Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts.** Loose clothes, jewellery or long hair can be caught in moving parts.
 - If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.
 - Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.** A careless action can cause severe injury within a fraction of a second.
- ## 4. Power tool use and care
- Do not force the power tool. Use the correct power tool for your application.** The correct power tool will do the job better and safer at the rate for which it was designed.
 - Do not use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
 - Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools.** Such preventive safety measures reduce the risk of starting the power tool accidentally.
 - Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** Power tools are dangerous in the hands of untrained users.
 - Maintain power tools.** Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
 - Keep cutting tools sharp and clean.** Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
 - Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** Use of the power tool for operations different from those intended could result in a hazardous situation.
 - Keep handles and grasping surfaces dry, clean and free from oil and grease.** Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.
- ## 5. Service
- Have your power tool serviced by a qualified repair person using only identical replacement parts.** This will ensure that the safety of the power tool is maintained.


AIR COMPRESSOR SAFETY WARNINGS

 **WARNING!** The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.

Young children should be supervised to ensure that they do not play with the appliance.

- The tool must be used only for its prescribed purpose. Any use other than those mentioned in this Manual will be considered a case of misuse. The user and not the manufacturer shall be liable for any damage or injury resulting from such cases of misuse.
- NEVER under any circumstances aim the Air brush at another person or animal.
- In the event of an injury occurring, seek medical advice immediately.
- The spray gun must not be used for spraying flammable paints and solvents with a flash point of less than 21°C.
- Be certain to read all the labels on the containers of paint or other materials to be sprayed. Closely follow all safety instructions. Use a respirator mask if there is a chance that you might otherwise inhale the spray material. Carefully check the effectiveness of any respirator mask you intend using.
- Always ensure there is adequate ventilation when spraying.
- The use of ear protection is recommended.
- Eye protection should be used to keep hazardous vapours and liquids out of eyes.
- Always wear a face mask when spraying.
- Always read the paint manufacturers thinning instructions before using.
- Always keep the spray nozzle in place during use. Never allow the spray to come in direct contact with the skin.
- To reduce the risk of fire or explosion, never spray flammable liquids in a confined area. If sparks come into contact with petrol vapours or solvents, they may ignite the vapours and cause a fire or explosion.
- Never immerse the airbrush or air compressor in liquid.
- NEVER spray near a naked flame, including an appliance pilot light.
- NEVER smoke whilst spraying.
- NEVER allow children to operate or play with the air brush or compressor.
- Always remove the plug from the mains socket before making any cleaning, adjustments or performing maintenance.
- After every use ensure you clean your air brush thoroughly.
- NEVER use the air brush or compressor outside when it is raining.
- Protect the plug and the power cable from heat, oil or sharp edges.
- If damaged, The power cable must be replaced by a qualified electrician.
- The electrical connection must always be made in a dry area. Make sure that electrical connections are protected from inundations.
- Before using the compressor, always inspect it visually. Do not use the compressor if it is cracked and/or damaged. If the compressor is damaged, contact Ozito customer service.
- Always use the handle to move the compressor.
- Never let the compressor come into contact with water or other liquids, as the appliance is live, this could cause electrocution or short-circuits. Never use the appliance with bare feet, wet hands or wet feet.

- Never pull on the power cable to disconnect the plug from the power outlet or to move the compressor.
- Do not leave unattended and operating.
- The compressed air produced by the compressor cannot not be used for pharmaceutical, food or medical purposes or to fill the air bottles of scuba divers.
- Do not cover the air inlets on the compressor or the compressor at any time.
- Compressors and lines may reach high temperatures during operation. Avoid contact! Risk of burns! Allow hot parts to cool before handling or servicing.
- Keep the compressor at least 300mm from the nearest wall to ensure adequate ventilation for cooling purposes.
- Protect the air hose and cord set from damage. Inspect for weak or worn spots regularly and replace if necessary.
- Always switch off the compressor before switching off the power or removing the power plug.
- After using the compressor, switch off the on/off button, disconnect the power supply and release any remaining pressure.
- Do not attempt to remove any part of the machine whilst it is under pressure.
- Check the maximum pressure rating of any tools or accessories that you intend to use with the compressor. The output pressure of the air from the compressor must be regulated so that it never exceeds the rated pressure of the tool or accessory.
- Do not attempt to block the air outlet with any part of your body or object.
- Drain the moisture from the tank after use. It will help prevent corrosion.
- Always refer to the paint manufacturers guide for correct disposal methods.
- The tool must be used only for its prescribed purpose. Any use other than those mentioned in this Manual will be considered a case of misuse. The user and not the manufacturer shall be liable for any damage or injury resulting from such cases of misuse.
- The manufacturer shall not be liable for any changes made to the tool nor for any damage resulting from such changes.
- Even when the tool is used as prescribed it is not possible to eliminate all residual risk factors. The following hazards may arise in connection with the tool's construction and design:
 - Damage to the lungs if an effective breathing mask is not worn.
 - Damage to hearing if effective earmuffs are not worn.
 - Damage to the eyes if effective safety goggles or shield are not worn.

 **WARNING!** In the event that an air line is cut or broken, the air supply must be turned off at the compressor. A broken air line which is not supported is extremely dangerous and can whip around very quickly, both with the capability of striking people, and blowing foreign particles into the air.

- Do not attempt to catch the air line but immediately keep bystanders well clear and turn off the air supply to the hose, turn off the compressor at the On / Off button, and then remove the hose from the compressor.
- Do not aim the airbrush at the air compressor.
- Always check safety release valve before use.