



## Tank capacity 13,3 Litres



This "power station" supplies energy and provides security.


Power will be available whenever it is needed. Power failures or insufficient current supply are no longer a problem; whether during camping, at building sites, in homes or cottages, on boats or in the garden. **This equipment can be used nearly everywhere, and, with its continuous power supply of 4,200 Watt, provides sufficient power for many applications. The large 13,3-litre tank ensures continuous operation for eleven hours at 2/3 load.** The power generator is powered by a high-quality diesel engine and is equipped with an overload switch.. With this power generator you are optimally equipped, regardless if it should be powered with 12V, 230V or 400V. With the economically diesel engine is the SE 5000 DF a cheap alternative to petrol driven power generators.

**Power: 6,3kW / 8,6 HP**



Starter battery not included in delivery

Manufacturer	Type	V	Ah
Varta	53030	12 V	30 Ah
Bayern Batterien	53030	12 V	30 Ah
Exide	53030	12 V	30 Ah
Banner Batterien	53030	12 V	30 Ah



## SE 5000 DF Power Generator

### Logistic Information:


<b>Type:</b>	SE 5000 DF	<b>Sales unit:</b>	1 pc
<b>Art.-No.:</b>	41.523.51	<b>20`:</b>	49 pcs
<b>Ident-No.:</b>	01016 / 01	<b>40`:</b>	96 pcs
<b>Bar Code:</b>	4006825 532289	<b>40` HC:</b>	144 pcs
<b>Packing:</b>	940 x 540 x 880 mm	<b>Weight:</b>	200 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.

File: S:\shared-pool\Product-Documentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\4152351\_01016.doc

Erstelldatum/create date: 19.10.2006 10:06:00Aktualisiert/up dated: 25.10.2006

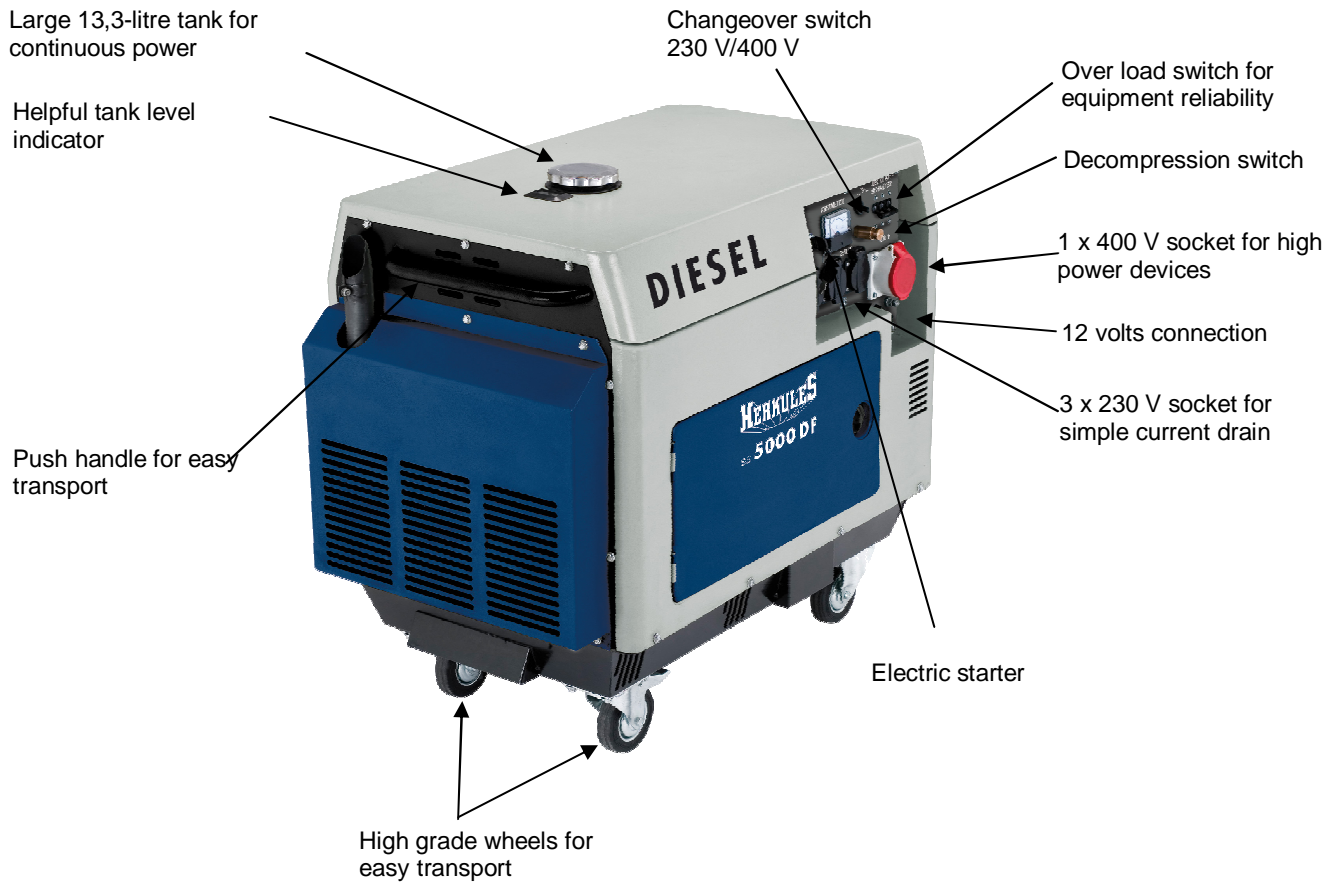

**Features:**

- Economically diesel engine
- Large 13,3-litre tank for continuous power
- Overload assurance for 12V
- Over load switch for equipment reliability
- 3 x 230 V socket for simple current drain
- 1 x 400 V socket for high power devices
- 1 x 12 V connection
- Changeover switch 230 V/400 V
- Voltmeter
- Helpful tank level indicator
- Electric starter
- Decompression switch
- Oil deficiency safety device to protect the motor
- High grade wheels and push handle for easy transport

**Technical Data:**

- Generator: Synchrony
- Continuous Power (S1): 1 x 4200 watts at 400V socket  
or: 3 x 1400 watts at 230 V socket
- Max. Power (S2 5 min): 1 x 5000 watts at 400 V socket  
or: 3 x 1650 watts at 230 V socket
- Voltage: 3 x 230 V 1 ~ / 1 x 400 V 3 ~  
1 x 12 V d.c.
- Frequency: 50 Hz
- Type: Diesel engine
- Cylinder capacity: 418 cm<sup>3</sup>
- Max. Motor power: 6,3 KW / 8,6 HP
- Fuel: Diesel
- Tank capacity: 13,3 l
- Running time at 2/3 load: Approx. 11 hours
- Noise level: 96 dB (A)

**Logistic Information:**

<b>Type:</b>	<b>SE 5000 DF</b>	<b>Tool:</b>	<b>Power Generator</b>
<b>Art.-No.:</b>	41.523.51	<b>Sales unit:</b>	1 pc
<b>Ident-No.:</b>	01016 / 01	<b>20`:</b>	49 pcs
<b>Bar Code:</b>	4006825 532289	<b>40`:</b>	96 pcs
<b>Packing:</b>	940 x 540 x 880 mm	<b>40`HC:</b>	144 pcs
		<b>Weight:</b>	200 kgs (gross)

