



# Einhell

**BLUE**

## BT-BC 8 Battery charger

Art.-No. 10.231.10

Robust and handy battery charger with 2 voltage setting 6 V + 12 V and charging rate switch for car- and motorcycle batteries. This charger has been specially designed for servicing of car- as well as motorcycle batteries. The charging progress can be seen on the built-in ammeter. The strong pole clamps warrants an optimum in contact to the battery poles. Furthermore the unit is equipped with a false poling and overload protection device and is housed in enamel baked steel sheet housing with carrying handle.


### Features

- All-insulated construction
- Sheet steel housing
- Carrying handle (1)
- Built-in ammeter (2)
- switch for 6 V and 12 V (3)
- switch for car and motorcycle (4)
- Overload- and false poling protection
- Mains cable with europe plug
- Charging leads with sturdy pole clamps (5)

### Technical data

- Mains voltage: 230 V ~ 50 Hz
- Charging voltage: 6 V and 12 V
- For lead batteries from: car: 20 – 120 Ah  
motorcycle: 3.7 – 30 Ah
- Weight: 2.45 kg
- Packing dimensions: 215 x 190 x 125 mm
- Bar code: 4006825 100921
- Sales unit: 6 pcs

Charging rate:	car	motorcycle
6 V:	8 A eff. / 5,6 A arithm.	0.85 A eff. / 0.55 A arithm.
12 V:	6.5 A eff. / 4,6 A arithm.	1.2 A eff. / 0.8 A arithm.

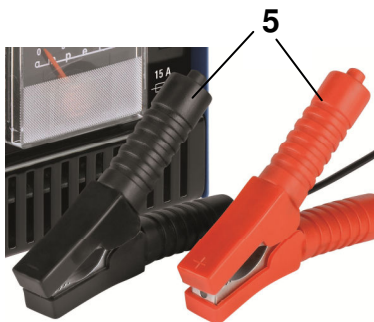

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.

File: \\aa-fas-2\office\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0t\Originale\_Englisch\_PA04\1023110\_01027.doc

Erstelldatum/create date: 20.02.2008 09:41:00Aktualisiert/up dated: 08.01.2014