

High precision, strong cuts!

Einhell®

NEW GENERATION



The radial tile cutting machine can be mounted quickly on the serial type support stand and is therefore suitable for mobile as well as stationary service.

With its unit one can cut wall- and floor tile, split tiles etc. Angle and double mitre cuts are possible and also jolly cuts.

The diamond cutting disc is cooled with the integrated pump for cooling liquids and an almost dust free operation is possible.

The tile cutting machine is equipped with a laser which shows the exact cutting line on the material to be cut. In addition, the laser unit, which is fastened to the machine by a magnetic adapter, can also be removed from the machine and used as a laser leveler when laying flooring materials or similar. The laser unit is therefore equipped with two spirit levels for the purpose.



NRF 800 L Radial Tile Cutting Machine with laser

Available as special accessory:

Diamond cutting disc:
Ø 200 x Ø 25,4 mm

Art.-No.: 43.011.75

Ident-No.: 01024

Bar-Code: 4006825 43436



Logistic Information:

Type:	NRF 800 L	Sales unit:	1 pc
Art.-No.:	43.012.70	20°:	168 pcs
Ident-No.:	01016	40°:	340 pcs
Bar Code:	4006825 533361	40° HC:	-- pcs
Packaging:	890 x 490 x 350 mm	Weight:	31.0 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.


File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n01\Originale_Englisch_PA04\4301270_01016.doc

Erstelldatum/create date: 21.09.2006 12:27:00Aktualisiert/up dated: 08.05.2007

High precision, strong cuts!

Einhell®

NEW GENERATION

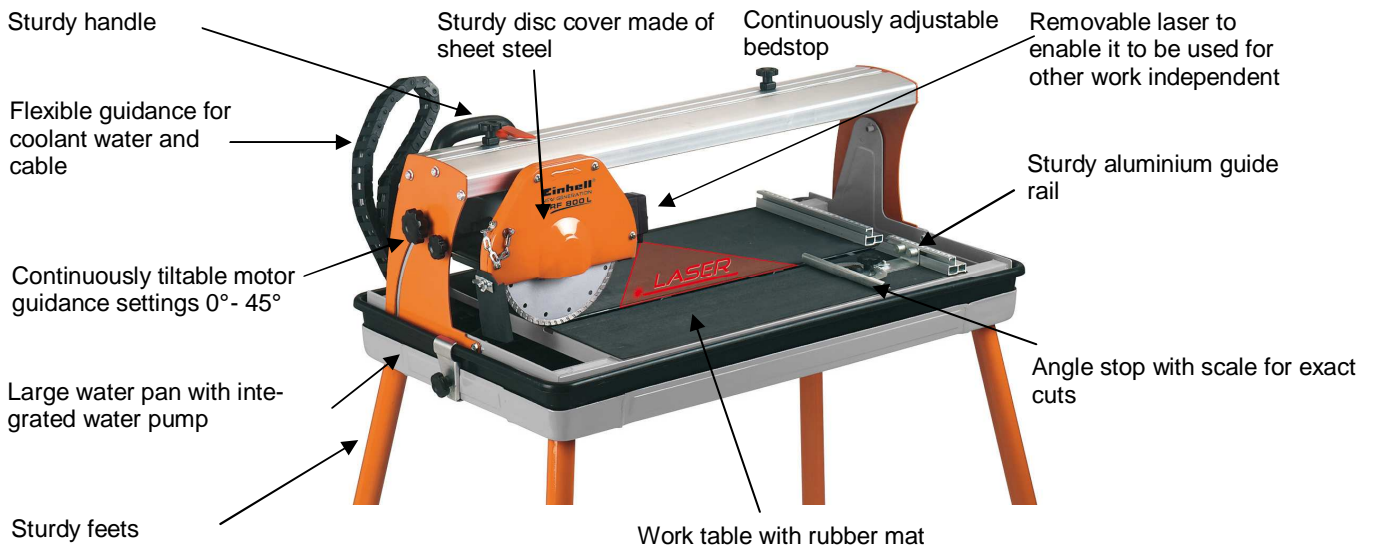

Continuously tiltable motor guidance settings 0° - 45°



Angle stop with scale for exact cuts



Large water pan with integrated water pump



RCD plug for machine safety

Features:

- Removable laser to enable it to be used for other work independent of the machine
- RCD plug for machine safety
- Motor setting 4-fold ball bearings
- Sturdy feet
- Sturdy aluminium guide rail
- Angle stop with scale for exact cuts
- Work table with rubber mat
- Large water pan guaranteed dust free working
- Diamond disc
- Sturdy disc cover made of sheet steel
- Integrated water pump

Technical Data:

- Mains: 230 V ~ 50 Hz
- Power: 800 watts
- Idle speed n_0 : 3000 min⁻¹
- Working table: 570 x 380 mm
- Working height: 700 mm
- Cutting depth max.: 90° - 30 mm / 45° - 25 mm
- Cutting length max.: 520 mm
- Mitre cuts: 0° - 45°
- Diamond disc: Ø 200 x Ø 25,4 mm
- Insulation class: IP 54

Logistic Information:

Type:	NRF 800 L	Tool:	Radial Tile Cutting Machine
Art.-No.:	43.012.70	Sales unit:	1 pc
Ident-No.:	01016	20`:`	168 pcs
Bar Code:	4006825 533361	40`:`	340 pcs
Packaging:	890 x 490 x 350 mm	40``HC:	-- pcs
		Weight:	31.0 kgs (gross)

