


Features

- Economically diesel engine
- Electric starter
- Decompression switch for problem-free starting
- Overload switch for equipment reliability
- 2 x 230 V sockets for simple current drain (1)
- Full current drain is also possible from only one 230 V socket
- Voltmeter (2)
- 1 x 400 V socket for high power devices (3)
- 1 x 12 V connection (4)
- Changeover switch 230/400 volts
- Large 16-litres tank for continuous power
- Helpful tank level indicator (5)
- Oil deficiency safety device to protect the motor
- High grade wheels with 2 guide rollers and push handle for easy transport
- Starter battery not included in delivery
- Full crank shaft
- Automatic voltage regulation
- With hook for an easy transport
- Capsuled type

Technical Data

- Generator: Synchronous
- Continuous power (S1): 4,200 W at 400 V
or: 3,000 W at 230 V
- Max. power (S2 5 min.): 5,000 W at 400 V
or: 3,300 W at 230 V
- Voltage: 2 x 230 V 1 ~ / 1 x 400 V 3 ~
1 x 12 V d.c.
- Frequency: 50 Hz
- Type: Diesel engine
- Cylinder capacity: 418 cm³
- Max. motor power: **6.3 kW / 8.6 HP**
- Fuel: Diesel
- Tank capacity: 16 l
- Running time at 2/3 load: approx. 8 hours
- Noise level: 96 dB(A)
- Net weight: 165.0 kg
- Gross weight: 185.0 kg
- Packing dimensions: 1,050 x 655 x 950 mm
- Bar code: 4006825 562453
- Sales unit: 1 pc

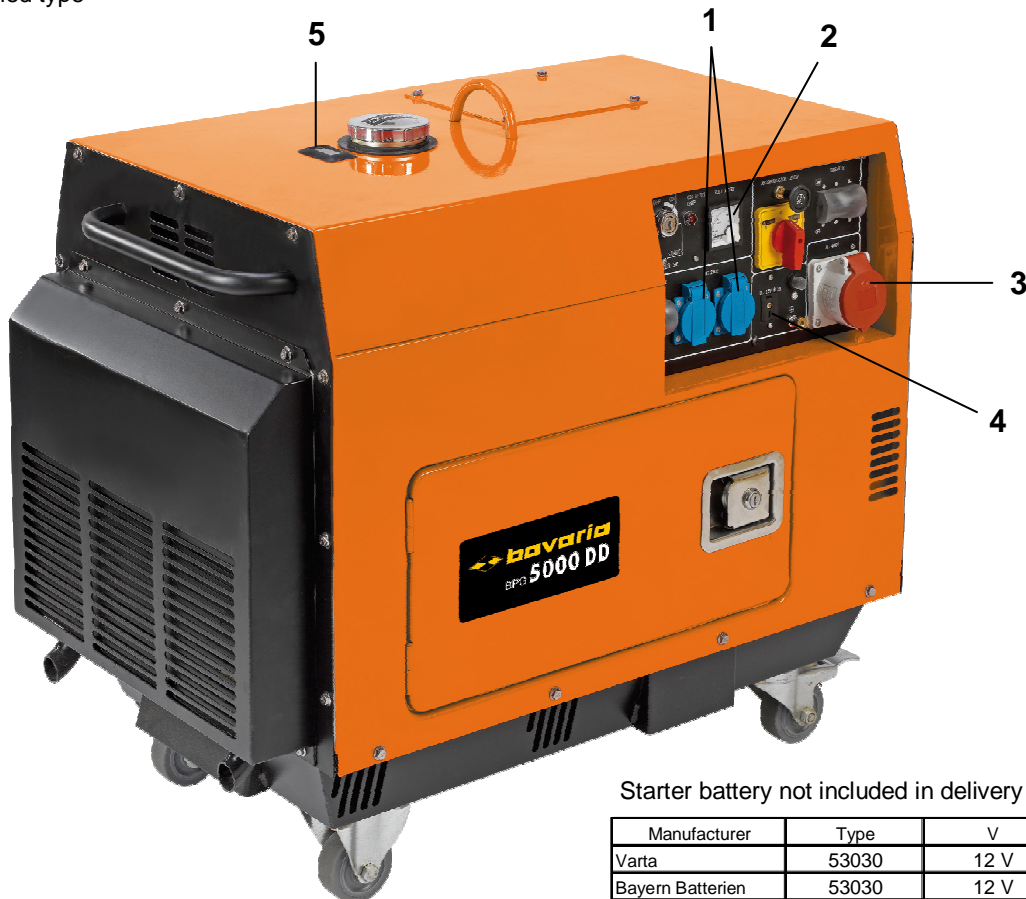

Starter battery not included in delivery

Manufacturer	Type	V	Ah
Varta	53030	12 V	30 Ah
Bayern Batterien	53030	12 V	30 Ah
Exide	53030	12 V	30 Ah
Banner Batterien	53030	12 V	30 Ah