



Einhell

BLUE

BG-SP 550 IF Submersible pump

Art.-No. 41.704.61

Ideal to empty flooded basements, tanks and containers, ect. The integrated float switch controls the ON/OFF functions of the pump. The float switch can be switched also in continuous operation position. In this session the pump is low level until 5 mm. The complete housing is made of an impact resistant material (plastic).

Features


- Handle (1)
- Universal connection (2)
- Reverse switch for manual - automatic (3)

Technical Data

- Mains: 230 V ~ 50 Hz
- Power: 550 W
- Delivery capacity max.: 11,000 l/h
- Delivery height max.: 8.5 m
- Immersion depth: 8 m
- Water temperature: up to 35 °C
- Hose connection: G 1 ½ (47.8 mm) female thread
- Exhaust height min.: 5 mm
- Min. height by starting: 60 mm
- Foreign particle size up to: Ø 5 mm
- Mains cable: 10 m H05RN-F
- ON function: approx. 14 cm
- OFF function: approx. 6 cm
- Net weight: 4.8 kg
- Gross weight: 5.2 kg
- Packing dimensions: 220 x 170 x 340 mm
- Bar code: 4006825 549331
- Sales unit: 4 pcs



Performance data:

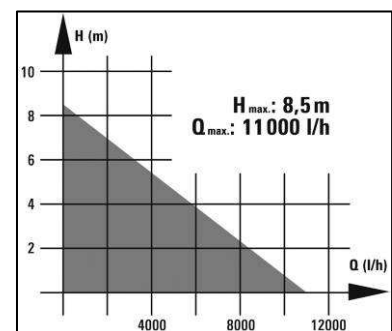

As special accessory available:

PVC-drainage hose 10 m/1"
Einhell Grey

Art.-No.: 41.737.14
Bar code: 4006825 549249

