

Cross-cut and mitre saw with upper table KGST 250 Profi

Art.-No.: **43.005.10**

Bar-Code: 4006825430813

Sales Unit: 1 pc

With model KGST 250 Profi one can cut wood and wood-like materials precisely and effortlessly. This unit is ideal for length cutting, trimming of floor- and wall panelling boards, picture frames as well as door- and window sills.

Features:

- Carbide tipped saw blade (1)
- Rotating plate continuously adjustable from -45° - +45° (2)
- Locking positions at 15°, 22,5°, 30°, 45°, 90°
- Tilting motor head to the left from 0° - 45° (3)
- Guide fence adjustable in parallel- and square position from -45° bis +45° (4)
- Dust collection bin Ø 35 mm

Technical data:


- Mains: 230 V ~ 50Hz
- Power: 1400 watts
- Idle speed: n_0 , 4000 min⁻¹
- Carbide tipp. saw blade: Ø 250 x Ø 30 x 3,2 mm
- No of teeth : 36
- Base plate size: 500 x 330 mm
- Swivelling range: -45° / 0 / +45°
- Weight: 21.7 kg
- Packing dimensions: 555 x 530 x 420 mm

Operating as a cross-cut saw:

- Angle cutting range: 0° - 45°
- Support table size: 475 x 150 mm
- Cutting width at 90°: 125 x 70 mm
- Cutting width at rotating table 45°: 84 x 70 mm
- Cutting width at 2 x 45°: 50 x 45 mm (double cutting width)

Operating as a table saw:

- Support cutting table: 330 x 150 mm
- Cutting height: 42 mm
- Parallel- and angle fence: -45° till +45°

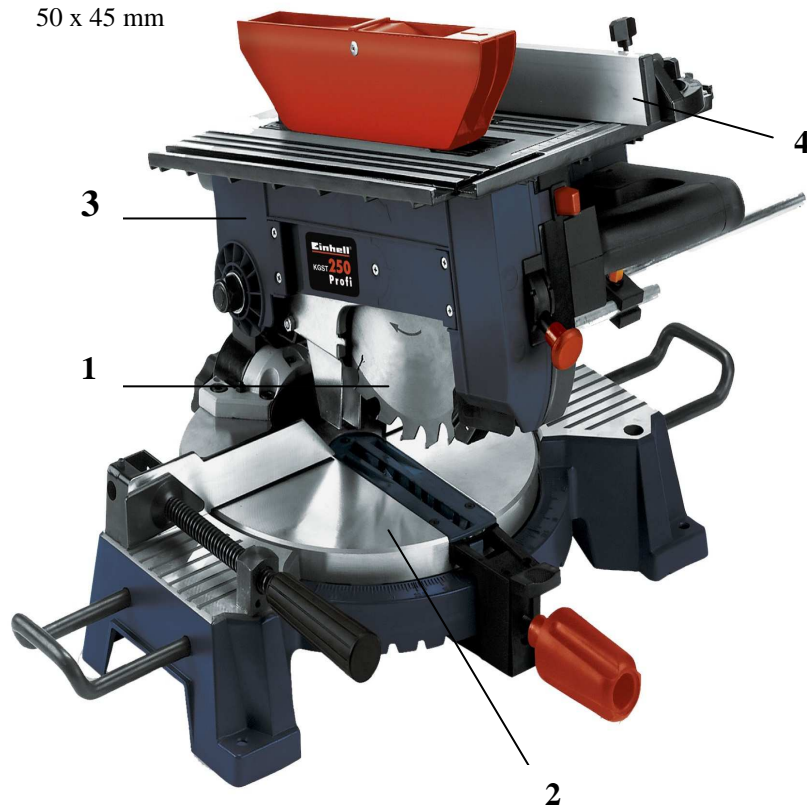

As special accessory available:

Spare saw blade
Ø 250 x Ø 30 mm 36 teeth
Carbide tipped saw blade
Ø 250 x Ø 30 mm 24 teeth

Art.-No.: **45.020.37**
Bar code: **4006825456141**
Art.-No.: **43.111.10**
Bar code: **40068254431223**

Carbide tipped saw blade
Ø 250 x Ø 30 mm 48 teeth
Carbide tipped saw blade
Ø 250 x Ø 30 mm 60 teeth

Art.-No.: **43.111.11**
Bar code: **4006825431230**
Art.-No.: **43.111.13**
Bar code: **4006825503166**