



Sliding Cross cut- and mitre table saw with base frame KSZ 4300 UG

Art.-No.: **43.006.73**

Bar code: 4006825532647

Sales unit: 1 pc



The sliding cross cut- and mitre table saw KSZ 4300 UG warrants a clean and smooth cut of wooden parts without problems. Double mitre cuts are possible with its tilting and swivelling motor-head. Due to its sliding feature the saw can cut 430 mm wide and therefore wide panels and laminate floorboard can be cut in one go. The undercarriage support makes the unit ideal for stationary or permanent service.

Features:

- Carbide tipped saw blade (1)
- Rotating table for precise angle cuts ranging from -45° to $+60^\circ$ (2)
- Incl. undercarriage support (3)
- Clamping device form for fixation of work piece (4)
- Tilting motor head to the left continuously from 0° to $+45^\circ$ (5)
- Incl. dust bag (6) and transport locking
- Incl. laser

Technical data:

- Mains: 230 V ~ 50 Hz
- Power: 2,000 watts
- Idle speed n_0 : $4,800 \text{ min}^{-1}$
- Saw blade: $\text{Ø } 250 \times \text{Ø } 30 \times 3 \text{ mm}$
- No. of teeth: 60
- Turning range: $-45^\circ / 0^\circ / +60^\circ$
- Panels max.: 430 mm
- Mitre cut: 0° to 45° to the left
- Cutting width at max. 90° : $430 \times 75 \text{ mm}$
- Cutting width at max 45° : $300 \times 75 \text{ mm}$
- Cutting width at max. $2 \times 45^\circ$: $300 \times 40 \text{ mm}$
(Width at double mitre cut):
- Weight: 33.5 kg
- Packing dimension: $870 \times 560 \times 440 \text{ mm}$

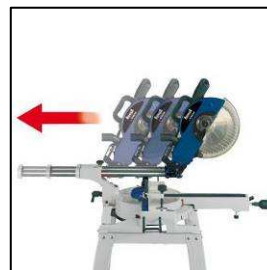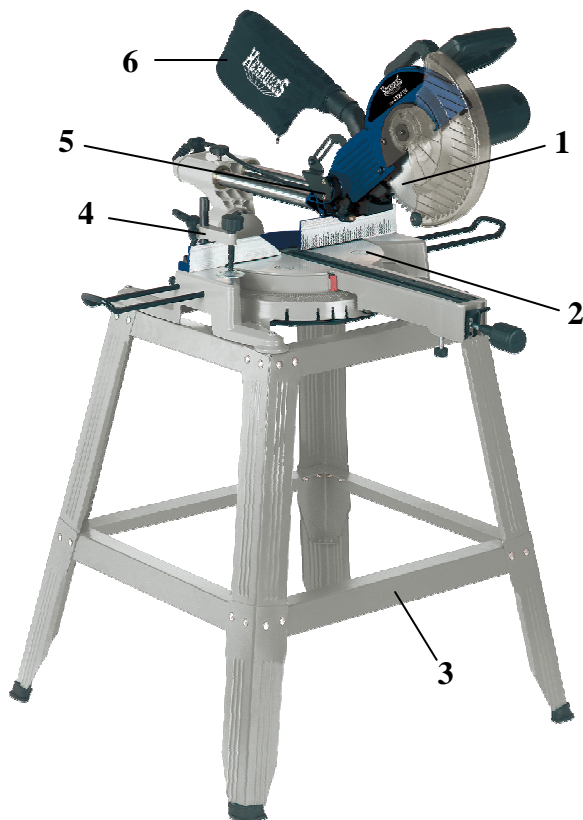

As special accessories available:

Carbide tipped saw blade

$\text{Ø } 250 \times \text{Ø } 30 \times 3.2 \text{ mm}$; teeth = 60

Art.-No.: **43.111.13**

Bar code: 4006825503166

Carbide-tipped saw blade

$250 \times \text{Ø } 30 \text{ mm}$; teeth = 24

Art.-No.: **43.111.10**

Bar code: 40068254431223

Carbide-tipped saw blade

$\text{Ø } 250 \times \text{Ø } 30 \text{ mm}$; teeth = 48

Art.-No.: **43.111.11**

Bar code: 4006825431230