

## Split-Air Conditioner SKA 5000 C + H

Art.-No.: 23.653.65

Bar code: 4006825514957

Sales unit: 1 pc

Single-room-split-air conditioner for wall installation with the features: cooling, heating, dehumidify and time programming device for ON/OFF.

**Complete with remote controlled transmitter** and 4 m connecting copper tubes with flexible insulation (max. 15 m possibly)

Easy installation of the air conditioner with a cooling capacity of **4,500 watts** and a heating capacity of **4,800 watts**. Ideal for large rooms until approx. 150 m<sup>3</sup>.

The unit consists of 2 parts, an outdoor part and one for indoors, in order to allow quick cooling and warrant an optimal noise level.

3 setting of fan speed with a maximum speed of 750m<sup>3</sup>/h.

With the **automatic de-humidification** the units evaporates from its surrounding max. **1.5 l/h** of excess humidity.

**Timer for programme settings, Automatic- and night functions.**

All functions can be set with the **remote controlled transmitter**. Supplied with LCD indicator. Motorized ventilation lamella in the indoor unit.

### Dimensions:

Indoor unit (WxHxD):	1000x198x320 mm
Outdoor unit (WxHxD):	850x290x610 mm

### Weight:

Indoor unit:	15 kg
Outdoor unit:	43 kg

**Packing dimensions inside tool:** 1050x370x290 mm

**Packing dimensions outside tool:** 1050x320x560 mm


### Features:

- Air suction grid (1)
- LED-display (2)
- Remote control (3)
- Air escape plate fin (4)
- Fan (5)

### Technical data:

- Free of FCKW (R407C)
- Energy-Efficiency-Class: C
- EER / COP: 2.85 / 3.24
- Energy consumption when cooling: 890 kWh per year
- Cooling capacity: 4,500 watts
- Heating capacity: 4,800 watts
- Air throughput: 750 m<sup>3</sup>/h
- Capacity of humidity reduction max: 1.5 l/h
- Mains: 230 V ~ 50 Hz
- Refrigerant quantity: approx. 1,300 g for 4 m of tube (for each further meter 20 g encloses)
- Noise level: Indoors: 43 dB(A)  
Outdoors: 56 dB(A)

Characteristics according to EN 14511

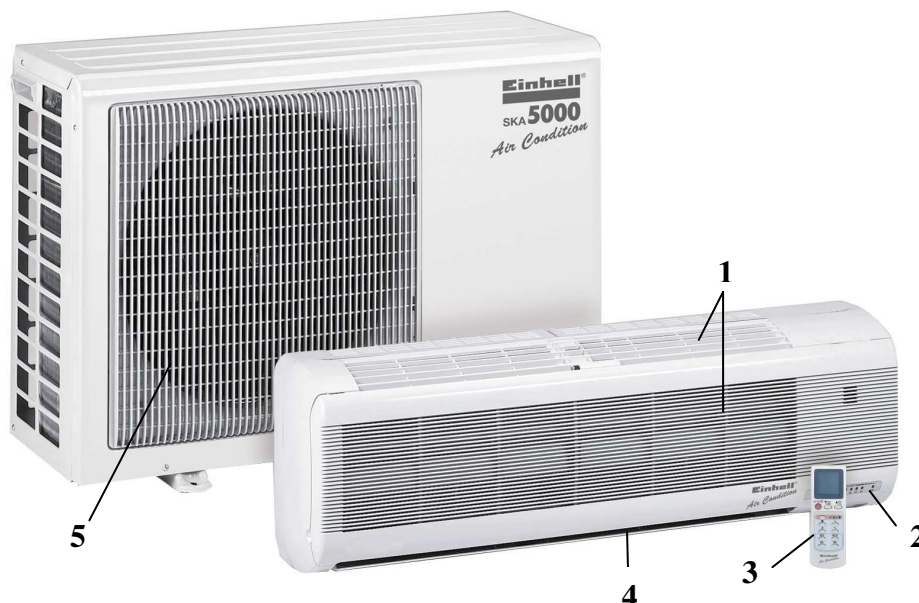

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30\_n0\Originale\_Englisch\_PA04\2365365\_01015.doc

Erstelldatum / create date: 18/11/2005 10:32:00

Aktualisiert / up dated: 05/09/2006