

## Split-Air Conditioner SKA 2501 C

Art.-No.: 23.651.60

Bar-Code: 4006825509113

Sales unit: 1 pc

Air conditioner for wall installation.

**Automatic dehumidifying of air in a room**

**Complete with remote controlled transmitter** and 4 m cooling agent connecting tubes with flexible insulation (max. 15 m possible at professional installation).

**Time programming device for ON/OFF.**

Easy installation of the air conditioner with a cooling capacity of **2500 watts/ 9000 BTU**. Ideal for rooms until approx. 80 m<sup>3</sup>.

The unit consists of 2 parts, an outdoor part and one for indoors, in order to allow quick cooling and warrant an optimal noise level.

Fan speed with a maximum speed of 420 m<sup>3</sup>/h.

With the **automatic dehumidification** the units evaporates from its surrounding **0,95 l/h** of excess humidity.

**Timer for programme settings, Automatic- and night functions.**

All functions can be set with the **remote controlled transmitter**. Supplied with LCD indicator. Motorized ventilation lamella in the indoor unit.

### Dimensions:

Indoor (WxHxD): 800 x 165 x 260 mm

Outdoor unit (WxHxD): 760 x 260 x 540 mm

### Weight:

Indoor unit: 9,5 kg

Outdoor unit: 32 kg

Weight complete: 41,5 kg


Packing dimensions: approx. 885 x 375 x 850 mm

### Features:

- Air suction grid (1)
- Air escape lamella (2)
- LED display (3)
- Remote control (4)
- Fan (5)
- Pipe connection

### Technical data:

- Free of FCKW (R407C)
- Energy-Efficiency-Class: C
- EER / COP: 2,87 / -
- Energy consumption when cooling: 502 kWh per year
- Cooling capacity: 2500 watts / 9000 BTU/h
- Air throughput: 420 m<sup>3</sup>/h
- Capacity of humidity reduction: 0,95 l/h
- Mains: 230 V ~ 50 Hz
- Power: 1000 watts
- Refrigerant quantity: 700 g for 4 m pipe
- Noise level: Indoors: ≤ 39 dB (A)  
Outdoors: ≤ 50 dB (A)

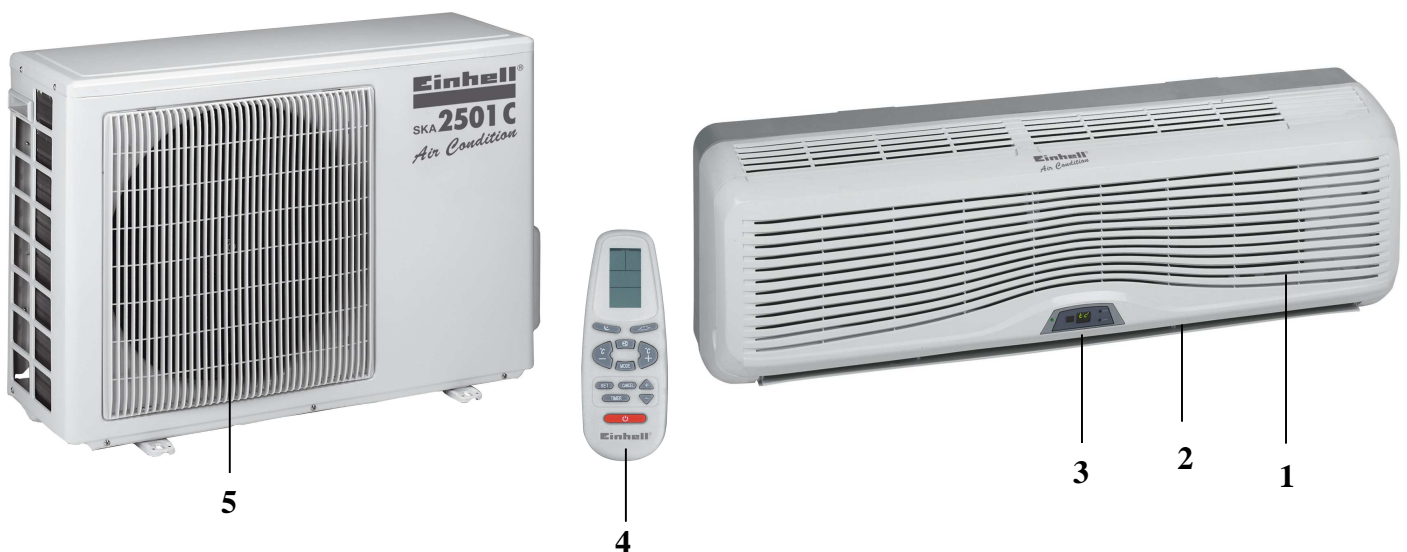

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: \\100.0.1.101\office\Webshop\T-Produktbeschreibung\60\Originale\_Englisch\_PA04\2365160\_01014.doc

Erstelldatum / create date: 17.01.2005 13:27

Aktualisiert / up dated: 04.05.2005