



## Submersible Pump TSE 600 i (stainless steel)

Art.-No: **41.705.08**

bar code: 4006825508949

sales unit: 4 pcs

Powerful and robust submersible pump to empty garden ponds, flooded basements and construction sites. The installed float switch controls the ON/OFF function of the pump. It takes foreign particles up to Ø 15 mm in size.

High quality of the materials, i. e. stainless steel-driving gear and top quality axial face seal warrants an almost maintenance-free and a long service life of product performance.

An exact fine-tuning between motor and turbine blade wheel achieves performance-effectiveness and above-average performance data.

### Technical data:



- Mains: 230V ~ 50 Hz
- Power: 600 watts
- Delivery capacity max.: 17.000 l/h
- Delivery height max.: 7,5 m
- Immersion depth max.: 5 m
- Water temperature max.: up to 35 degrees
- Hose connection: 1 1/2" female thread
- Foreign particles size: up to Ø 15 mm
- Mains cable: 10 m H07RN-F
- ON function: approx. 50 cm
- OFF function: approx. 5 cm
- Weight: 8.4 kg
- Packing dimensions: 170 x 235 x 350 mm

### Features:

- Carrying handle (1)
- Float switch (2)
- 5-pcs connection kit (3)

### Performance data:

Delivery height:	Delivery capacity:
2 m	max. 15.600 l/h
4 m	max. 12.900 l/h
6 m	max. 9.000 l/h

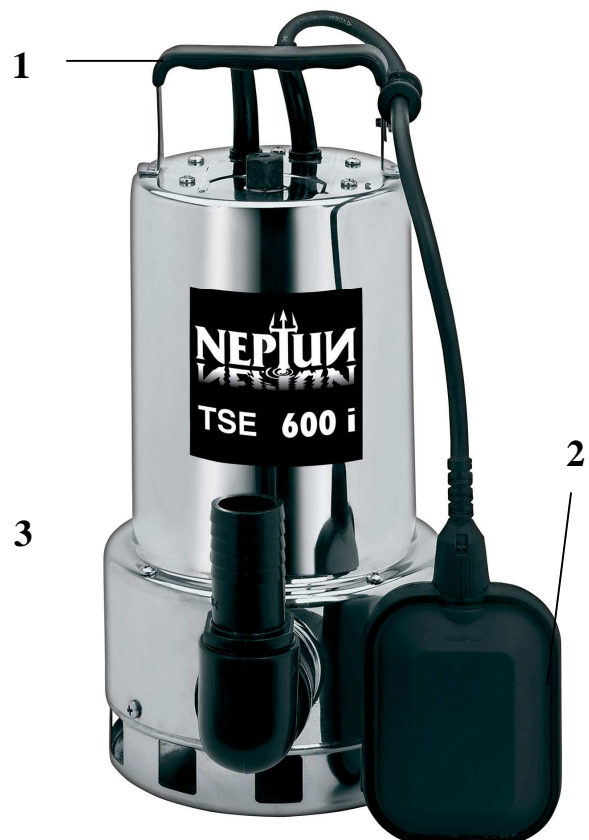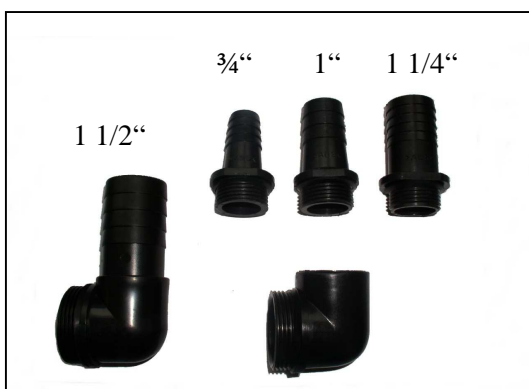

### As special accessory available:

Drainage hose 10 m / 1" (material: PVC)

Art.-No.: **41.737.11**  
bar code: 4006825414707

