

Split-Air Conditioner SKA 2500 Dual C + H

Art.-No.: 23.653.85

bar code: 4006825234756

sales unit: 1 pcs

Air conditioner for **cooling and heating** for wall installation. **Automatic de-humidifying** of air in a room. **Complete with remote control** and 2 x 4 m connecting copper tubes with flexible insulation (max. 15 m possibly).

Time programming device for ON/OFF

Easy installation of the air conditioner with a cooling capacity of **2 x 2500 watts** and a heating capacity of **2 x 2900 watts**. Ideal for two larger rooms until approx. 80 m³ volume.

The unit consists of 3 parts, an outdoor part and two for indoors, in order to allow quick cooling and warrant an optimal noise level. 3 Settings of fan speed with a maximum speed of 2 x 420 m³/h. With the **automatic-de-humidification** the units evaporates from its surrounding approx. **2x 1.0 l/h** excess humidity. **Timer for program settings, automatic- and night functions**. All functions can be set with the **remote control**. Supplied with LCD indicator, motorized ventilation lamellas in the indoor unit.

Dimensions:

Indoor unit (WxHxD): 77 x 25 x 18 cm
(2 units)

External unit (WxHxD): 85 x 61 x 31 cm

Weight:

Internal unit: 2 x 8 kg

External unit: 52 kg

Gross weight: 87 kg


Features:

- Fan (1)
- Pipe connection (2)
- Air suction filter (3)
- LCD-display (4)
- Air escape lamellas (5)
- Remote control (6)

Technical data:

- Free of FCKW (R407C)
- Energy-Efficiency-Class: C
- EER / COP: 2,87 / 3,23
- Energy consumption when cooling: 2x 445 kWh per year
- Cooling capacity: 2 x 2.500 watts
- Heating capacity: 2 x 2.900 watts
- Air performance: 2 x 420 m³/h
- Mains: 230 V ~ 50 Hz
- Capacity of humidity reduction: 2 x 1,0 l/h
- Quantity of coolant: approx. 2 x 800 g/ for 4 m tubes (for each metre add 20 g more coolant)
- Noise Level: Indoors: 38 dB (A)
Outdoors: 55 dB (A)

Characteristics according to EN 14511

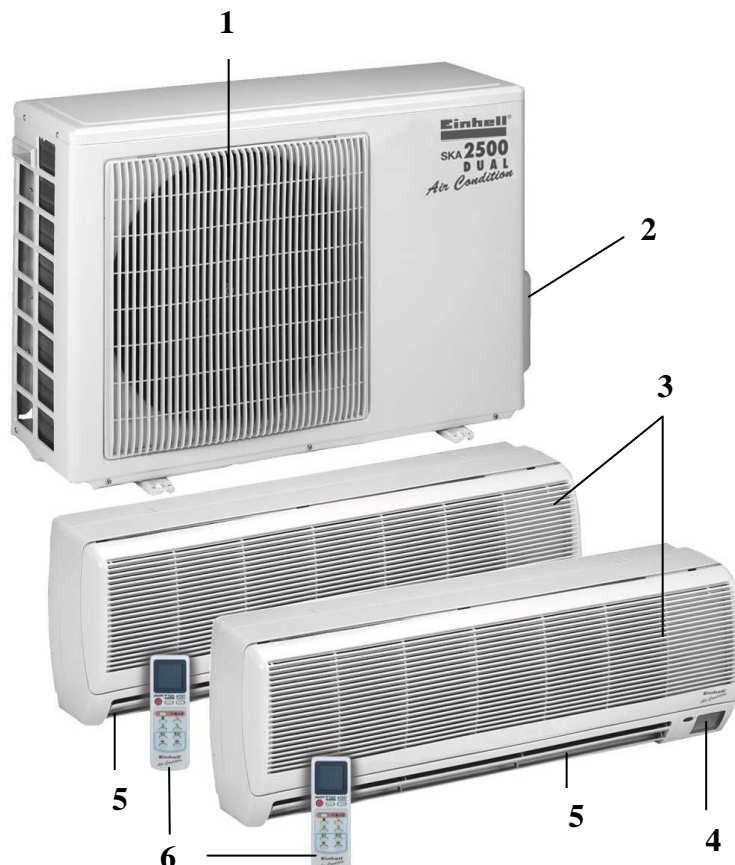

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n0t\Originale_Englisch_PA04\2365385_01013.doc

Erstelldatum / create date: 05.11.2003 15:20:00

Aktualisiert / up dated: 06.08.2007